

# ANOTEST® YMP30-S

Sealing quality tester for anodic coatings on aluminum



## Handheld instrument for on-site testing

The weather resistance of a finish is a function of sealing quality. According to DIN EN ISO 12373-5 and ASTM B 457-67, the admittance (Y) of a capacitor in which the anodic oxide film forms the dielectric is a good yard-stick of sealing quality.

The ANOTEST® YMP30-S measures the admittance according to standards, and due to its design is ideally suited for on-site testing.

## Measurement procedure


A self-adhesive rubber ring is placed on the surface to be tested and the space so enclosed filled with a few drops of a test fluid. The aluminum substrate is then connected to the earthing socket of the unit and the test electrode dipped into the cell fluid, thereby forming a capacitor in which the anodic film acts as the dielectric. It is the admittance of this capacitor which is measured and directly indicated in  $\mu\text{S}$  (microsiemens).



ANOTEST® YMP30-S with grounding cable and grounding clamp, meas. electrode and meas. cell

### Features

- Large LCD
- Battery or AC line operated
- Automatic measurement start after insertion of the probe in the cell
- Automatic computation of the admittance referenced to standard sizes
- Signaling for poor sealing (e.g.,  $Y > 15 \mu\text{S}$ )
- Acoustic signal for start and end of measurement
- Automatic shut-off
- Storing of 10,000 measurements in up to 100 applications
- Statistical evaluation
- Display selectable in 8 languages
- RS232 interface for printer or PC

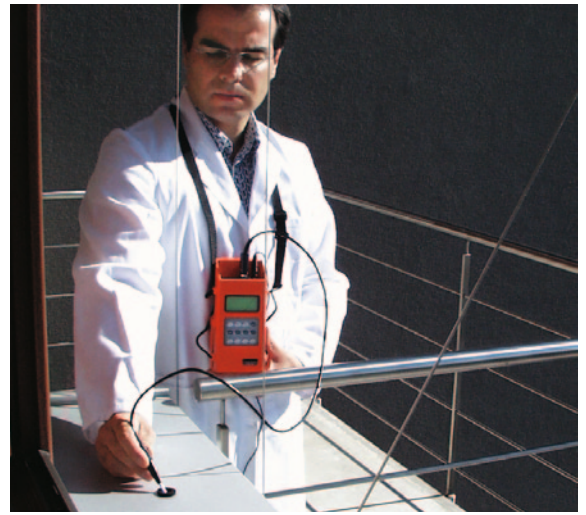

Practical and sturdy carrying box for on-site measurements

### Technical data

Meas. frequency: 1 kHz (DIN EN ISO 12373-5)  
 Measuring ranges: Test cell  $\varnothing$  6 mm(1): 14 - 1400  $\mu\text{S}$   
 Test cell  $\varnothing$  13 mm: 3 - 200  $\mu\text{S}$   
 Test cell  $\varnothing$  26 mm(1): 0,75 - 75  $\mu\text{S}$   
 Power supply: battery 9V6LR61  
 Instrument dimensions (L x W x H): 160 mm x 80 mm x 30 mm  
 Mass: 230 g

<sup>(1)</sup> The meas. cells with a  $\varnothing$  of 6 mm and a  $\varnothing$  of 26 mm do not permit standardized measurements because the test areas are too small or too large

### Order information

	Order no.
Instrument incl. standard accessories	
ANOTEST® YMP30-S	603-800
<i>Optional Accessories</i>	
Electrical reference	600-772
Placement support	600-025
Interface set MP	602-341
Adapter USB – RS232	603-650
Carrying box MP	602-891
Carrying case MPOD/30/40	602-120
<i>Spare Parts</i>	
Measuring cable YMP30-S	603-855
Grounding cable ANOTEST®	600-767
Grounding clamp, stainless steel	600-766
Bottle testing liquid	600-768
VE meas. cell $\varnothing$ 6 mm	600-769
VE meas. cell $\varnothing$ 13 mm	600-770
VE meas. cell $\varnothing$ 26 mm	600-771

**Helmut Fischer GmbH Institut für Elektronik und Messtechnik**, 71069 Sindelfingen, **Germany**, Tel. +49 70 31 30 30, mail@helmut-fischer.de  
**Fischer Instrumentation (GB) Ltd**, Lymington/Hampshire SO41 8JD, **England**, Tel. +44 15 90 68 41 00, mail@fischergb.co.uk  
**Fischer Technology, Inc.**, Windsor, CT 06095, **USA**, Tel. 1 (860) 683-0781, info@fischer-technology.com

**Helmut Fischer AG**, CH-6331 Hünenberg, **Switzerland**, Tel. +41 41 785 08 00, switzerland@helmutfischer.com  
**Fischer Instrumentation Electronique**, 78180 Montigny le Bretonneux, **France**, Tel. +33 1 30 58 00 58, france@helmutfischer.com  
**Helmut Fischer S.R.L.**, 20099 Sesto San Giovanni (Milano), **Italy**, Tel. +39 02 55 26 26, italy@helmutfischer.com  
**Fischer Instruments, S.A.**, 08018 Barcelona, **Spain**, Tel. +34 9 33 09 79 16, spain@helmutfischer.com  
**Helmut Fischer Meettechnik B.V.**, 5627 GB Eindhoven, **The Netherlands**, Tel. +31 40 248 22 55, netherlands@helmutfischer.com  
**Fischer do Brasil**, 04561-001 São Paulo, **Brazil**, Tel. +55 11 35 88 09 09, brasil@helmutfischer.com  
**Fischer Instruments K.K.**, Saitama-ken 340-0012, **Japan**, Tel. +81 489 29 34 55, japan@helmutfischer.com  
**Fischer Instrumentation (Far East) Ltd**, Kwai Chung, N.T., **Hong Kong**, Tel. +852 2420 11 00, hongkong@helmutfischer.com  
**Fischer Instrumentation (S) Pte Ltd**, Singapore 658065, **Singapore**, Tel. +65 6276 6776, singapore@helmutfischer.com  
**Nantong Fischer Instrumentation Ltd**, Shanghai 200333, **P.R. China**, Tel. +86 21 32 51 31 31, china@helmutfischer.com  
**Fischer Measurement Technologies (India) Pvt. Ltd**, Pune 411036, **India**, Tel. +91 20 26 82 20 65, india@helmutfischer.com

www.helmut-fischer.com