


Autocorrelator

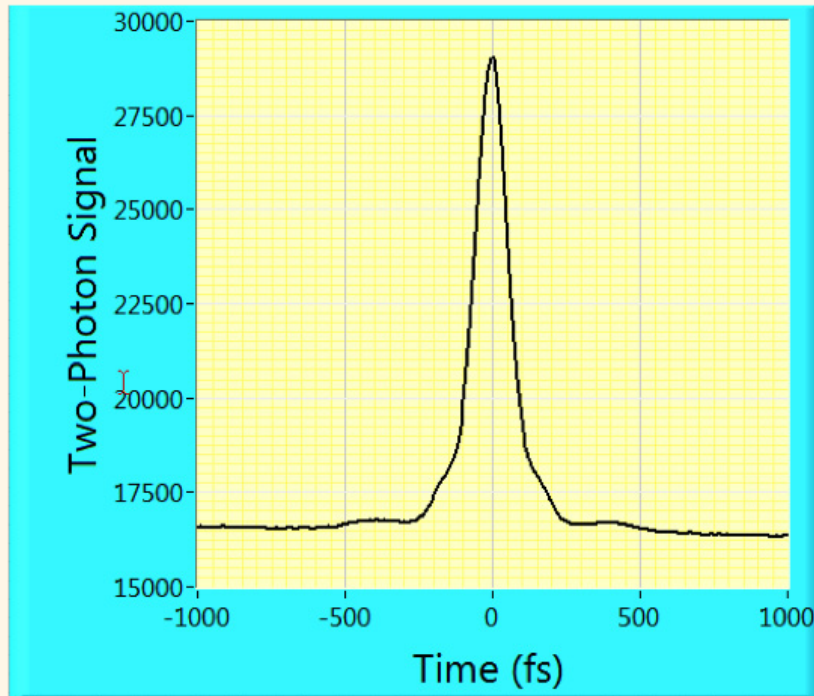

Autocorrelation of a fiber laser with pulse width of < 100 fs, single 1 sec scan

- 1 fs resolution
- Time window up to 60 ps
- High sensitivity
- Easy alignment
- Stand-alone operation via USB or external analog control
- Fiber coupled options available
- Analog or digital data acquisition
- Digital scan rates over USB up to 4 Hz
- 40 Hz scan rate under analog control
- Suitable for high repetition rate lasers
- Wavelength coverage from 700–1350 nm and 1200–2100 nm

Acquire

Analyze

Improve