EQ-1500 LDLSTM

High-Brightness, Long-Life, Broadband Laser-Driven Light Source



Researchers using light for imaging and analytical spectroscopy in a variety of applications in the life sciences and materials sciences need light sources capable of providing extremely high brightness across a broad wavelength range. Traditionally, multiple lamps (Tungsten/Halogen, Xenonarc, Deuterium) have been used to cover this broad spectral range. However, combining multiple lamps is costly and optically inefficient, and the use of electrodes within these lamps limits their ability to achieve the high brightness or power needed for the most demanding applications. Furthermore, traditional electrode-driven light sources have short life, need to be changed frequently, and during their life the lamp output declines constantly. To address this problem, Energetiq has developed a revolutionary single light source technology called the LDLS™Laser-Driven Light Source that enables extreme high brightness, with a relatively flat spectrum, from 170nm through visible and beyond, combined with life time an order of magnitude longer than traditional lamps.

The LDLS technology is fully embodied in the EQ-1500— an extremely bright and stable, compact broadband source that is specifically designed for critical spectroscopy and imaging applications. The EQ-1500 offers superior spatial and power stability for highly repeatable measurements, and provides direct imaging of the plasma for optimized coupling to the instrument. Utilizing a patented laser-driven bulb technology*, the EQ-1500 is ideal for applications requiring ultra-long lamp life combined with high broadband brightness.

* Multiple Patents Worldwide


Features and Benefits

- CW laser plasma discharge
- Extreme high brightness across broad spectrum
 UV-Vis-NIR (170nm 2100nm)
- Eliminates need for multiple lamps
 - Replaces D2/Tungsten/Xenon Arc
- Excellent spatial stability
 - Repeatable measurements
- Superior short and long term power stability
 - Repeatable measurements
- Electrodeless operation for long life
 - Reduced consumable costs
 - Minimal recalibration of instrument

Applications

- Monochromator Source
- UV-Vis-NIR Spectroscopy
- Photoemission Electron Microscopy (PEEM)
- Materials Characterization
- Environmental Analysis
- Hyperspectral Imaging
- Gas Phase Measurements
- Advanced Microscopes



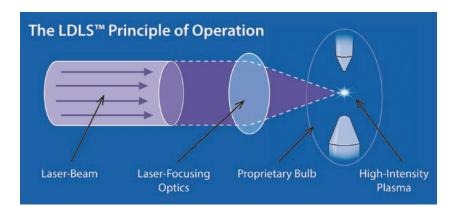

EQ-1500 lamp house with power supply



Specifications

Overview

- Spectral output from 170nm 2100nm
- Large collectable view angle Numerical Aperture (NA): up to 0.50
- Typical bulb life >9,000 hrs.
- Flexible optical interface for free-space or fiber optics
- Various precision reflective coupling optics are available from Energetiq. Call for details.

Physical Specifications EQ-1500

• Lamp House

• Power Supply

System Dimensions (H x W x D)

160.0 x 142.2 x 218.4 mm (6.3 x 5.6 x 8.6 in) 141.5 x 254.0 x 317.5 mm (5.6 x 10.0 x 12.5 in)

Weight

5.0 kg (11.0 lbs) 6.5 kg (14.3 lbs)

Utility Requirements

• Electrical

90-264 VAC, 200 W max

• Cooling Water

Water: 3 PSID, 0.25–0.5 GPM, 18°C inlet temperature controlled within \pm 1°C


(Chillers available from Energetiq)

• Nitrogen

For purging, Grade 6 recommended

• Compliance

CE Mark. Class 1 Laser Product

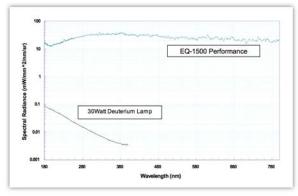

Patent Numbers: US 7,435,982; US 7,786,455; GB 2,450,045; **Other patents applied for.**





About Energetiq

Energetiq Technology, Inc. is a developer and manufacturer of advanced light sources that enable the analysis and manufacture nano-scale structures and products. The Energetiq team combines its deep understanding of the high power plasma physics needed for high-brightness light generation with its long experience in building rugged industrial & scientific products. The result is that users can expect the highest levels of performance combined with the highest reliability.



Energetiq Technology Inc. 7 Constitution Way Woburn, MA 01801 Phone: +1 781-939-0763 Fax: +1 781-939-0769 Email: info@energetiq.com www.energetiq.com

Specifications are subject to change without notice. LDLS EQ1500—1/14