


全自动塔式分切复卷机

QuickSlit

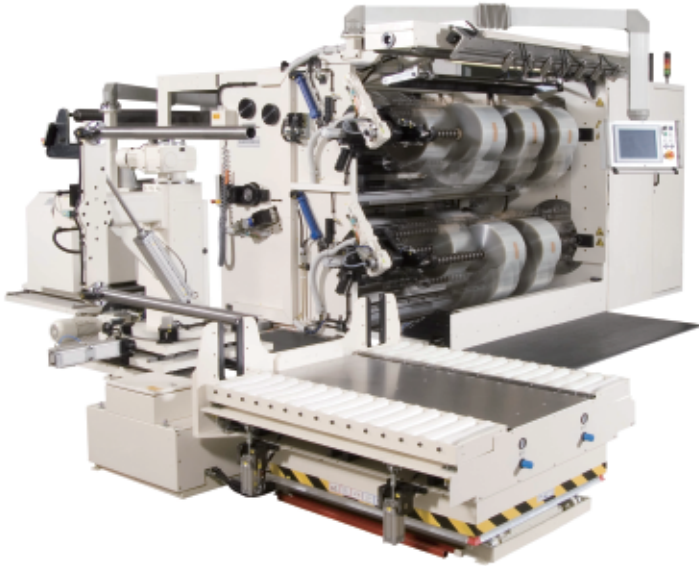

Fully Automatic Roll Change while Production

The machines of the QuickSlit Series are fully automatic slitting and rewinding machines with a dual turret winder. They are suitable for the precise and efficient handling of almost all kinds of material up to a diameter of 23,5 inch.

The application of four winding shafts allows minimized downtimes of the machines. While two of the four winding shafts are working the other two can automatically be unloaded and re-armed

The automatic handling systems increase simplification of handling and decrease by than the downtimes. Furthermore they manage to cut off the reels and transport them to the packing station automatically.

在生产程中实现全自动换卷

QuickSlit 系列机组是全自动双工位塔式分切复卷机，该设备可精确并高效地处理多种不同的材料，直径可达23.5英寸。

4 套收卷辊的应用实现了换卷时的最小停机时间，当其中两根卷辊在运作时，另外两根卷辊可自动完成卸卷和套入新纸管。


其中全自动处理系统可提高操作的简易性并缩短换卷停机时间，也可全自动完成分切成卷并将成卷运送到包装工序中。

Your slitter rewinder perfectly designed!



全自动塔式分切复卷机

QuickSlit

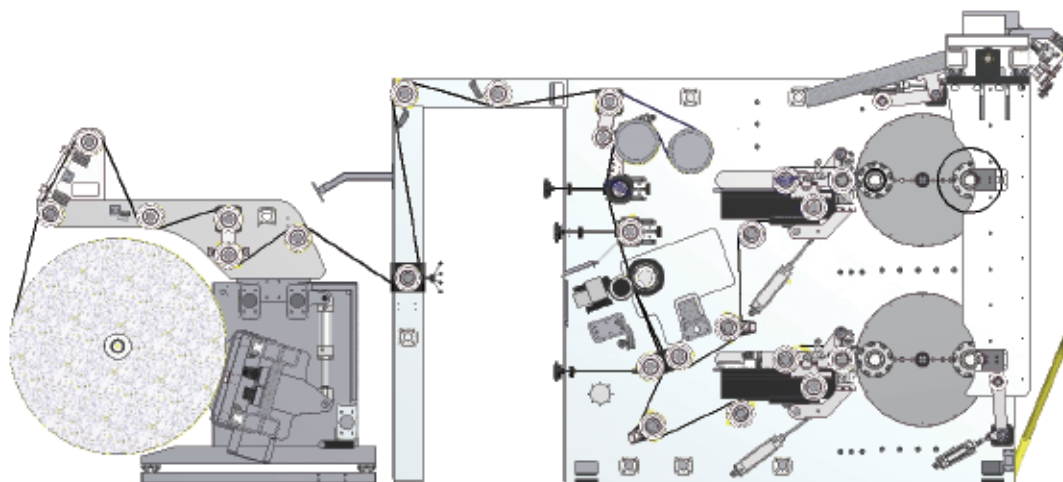

Technical Data

技术参数

Working width up to 最大幅宽	2200 mm
Parent roll weight up to 母卷最大重量	3000 kg
Unwinder diameter up to 退卷最大直径	Ø 1600 mm
Core diameter 纸芯直径	Ø 50 - 200 mm
Slitting systems 分切系统	shear cut, blade cut in groove, cut in air, crush cut, burst cut 剪切, 切槽分切, 悬空切, 压切, 破裂切
Min. slitting width 最小分切宽度	20 mm
max. rewind diameter 最大复卷直径	Ø 600 mm
max. machine speed 最大运行速度	800 m/min.
Material 适用材料	Technical films, packaging films, soft and hard films, Papers, Laminates, Aluminum composite materials 工业用膜, 包装膜, 软膜和硬质膜, 纸张, 层压材料, 铝箔复合材料