



## CLEAN PH30 单手量测新主张 pH值 快意取得

搭配各种环境专用电极,  
单手pH量测, 游刃有余


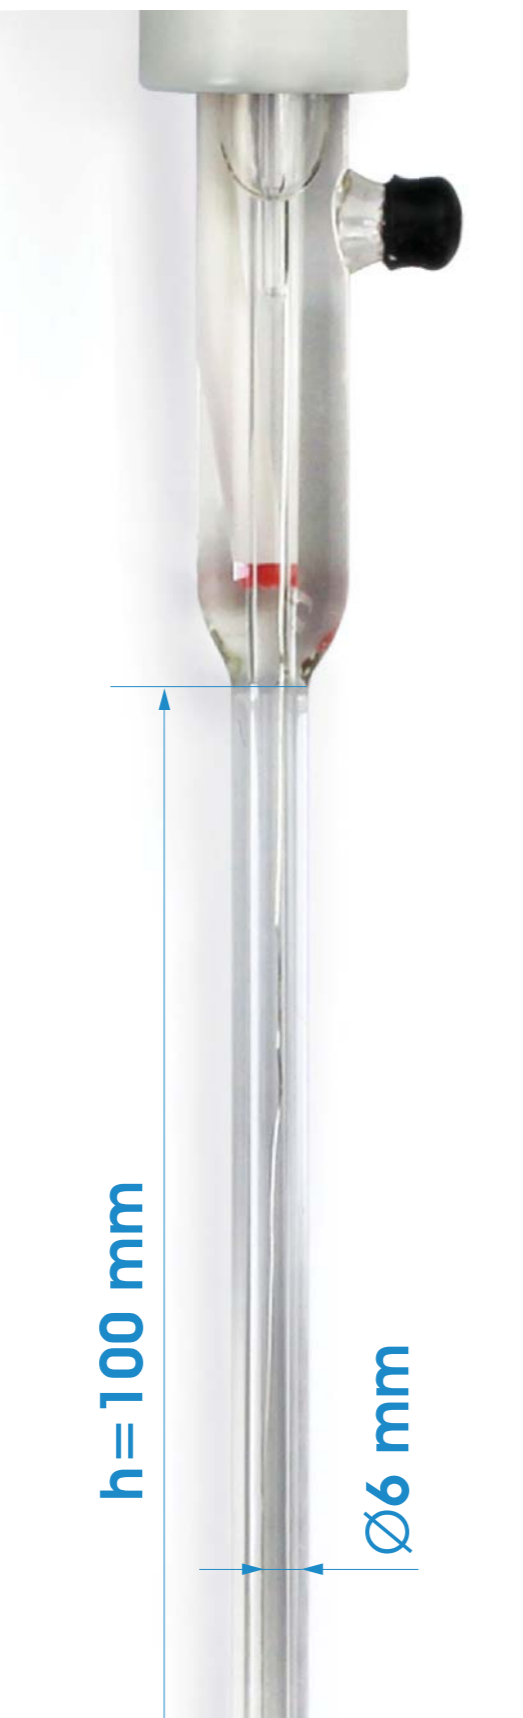

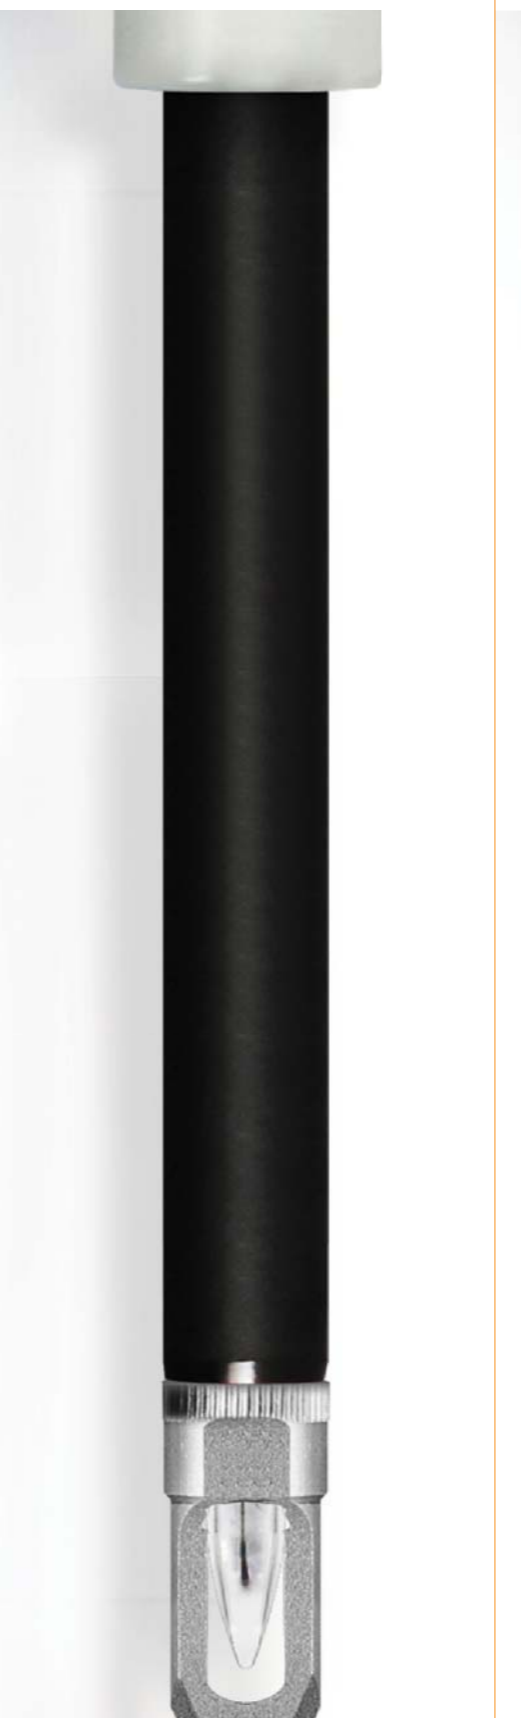






- PH30主机可搭配各种专用电极。
- IP67防水等级。
- 4键简易操作, 握持舒适。
- 具备读值自动锁定功能。
- 维护简单, 轻易更换电池和电极。
- 背光屏幕, 多行显示, 方便阅读。
- 1 \* 1.5 AAA电池寿命长。
- 无按键动作后 5 分钟自动关机。

pH量程	-2.00 ~ +16.00 pH
pH分辨率	0.01pH
pH精确度	±0.01pH
温度测量范围	0 - 100.0 °C / 32 - 212 °F
使用温度范围	0 - 60.0 °C / 32 - 140 °F
温度分辨率	0.1 °C / 1 °F
校正	自动识别 3 点标准液校正
pH 标准液	USA: 4.01, 7.00, 10.01 NIST: 4.01, 6.86, 9.18

屏幕	20 * 30 mm 多行液晶显示屏
温度补偿	ATC 自动 / MTC 手动
锁定功能	手动 / 自动
保护等级	IP67
自动背光	30 秒
自动关机	5 分钟
电源	1x1.5V AAA电池 7号电池
尺寸	(H×W×D) 285×40×48 mm
重量	130 克



通用型  
PH30- Pleasure  
CS1930L

微量	试管	半固体	刺入	纯水	强酸强碱	氢氟酸环境	海水	胶体/粘稠物/涂料	有机溶剂
PH30-Micro	PH30-Testtube	PH30-Semisolds	PH30-Piercing	PH30-Purewater	PH30-Precision	PH30-HF	PH30-Seawater	PH30-Colloid	PH30-Organic
									
可填充 CS1903	可填充 CS1906	CS1912	CS1915	可填充 CS1918	CS1921	CS1928	CS1929	CS1958	CS1997

