

**TEM<sub>00</sub> Beam Profile, Diode Laser Pumped, Q-Switched Solid-State Laser  
Single Frequency Wavelength 193 nm**



## General Description

The IXION-193 is a single frequency all-solid-state laser system for applications such as optical metrology, calibration of 193 nm stepper optics or bandwidth control of high power ArF excimer lasers. The spectral bandwidth is near its theoretical Fourier limit.

The center wavelength of the system can be chosen at time of order between 190 and 194 nm with an accuracy of 0.01 nm.

As an option a high precision spectrometer with an absolute spectral accuracy of 0.001 nm is integrated into the system. This allows maximum control of the spectral tuning of the laser.

## Applications

- 193 nm metrology
- Spectrometer calibration
- Interferometry
- Injection seeding of Excimer lasers

## Features

- Industrial proved frequency conversion
- Diode laser pumped
- Sealed housing
- Slot mounted laser diode
- Excellent TEM<sub>00</sub> beam profile
- Low pulse-to-pulse fluctuation ( $\sigma < 3\%$ )
- Maintenance-free thermo-electrical heat management
- 19"-rack power supply and chiller
- LabVIEW drivers
- Integrated Spectrometer for online wavelength control (optional)

## Product Specifications

| model               | IXION-193 SLM   |
|---------------------|---|
| wavelength          | 193.368 nm  |
| average power       | > 10 mW   |
| pulse duration      | < 10 ns   |
| energy per pulse    | 1.6 $\mu$ J   |
| repetition rate     | 6 kHz   |
| M <sup>2</sup>      | < 1.6   |
| spectral linewidth  | < 120 MHz $\Leftrightarrow$ 0.015 pm $\Leftrightarrow$ 0.004 cm <sup>-1</sup> |
| spectral tunability | > 80 GHz $\Leftrightarrow$ 10 pm $\Leftrightarrow$ 2.6 cm <sup>-1</sup>       |
| coherence length    | > 1 m   |

Specifications are subject to change without notice due to product improvement.

## System Dimensions (L x W x H), weight


|   |                                 |       |
|---|---------------------------------|-------|
| <b>Laser head</b>                           | 795 x 710 x 154 mm <sup>3</sup> | 74 kg |
| <b>Power supply<br/>(including Chiller)</b> | 600 x 600 x 600 mm <sup>3</sup> | 45 kg |

## Electrical Characteristics


|            |
|------------|
| 85-264 VAC |
| 47 – 63 Hz |
| 650 W typ. |

## Typical Performance


### pulse duration

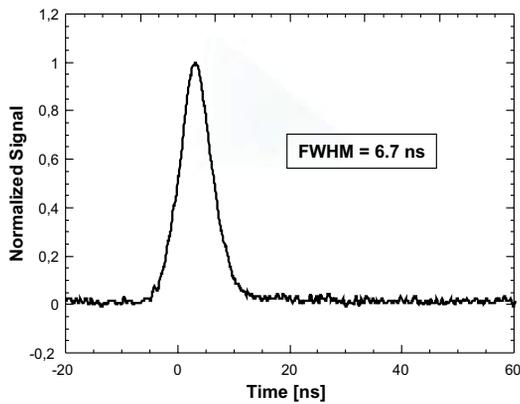


### beam profile

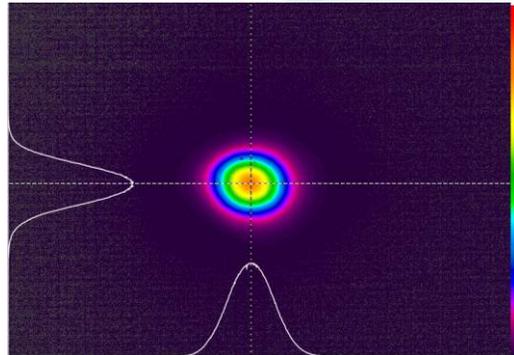


### spectral bandwidth

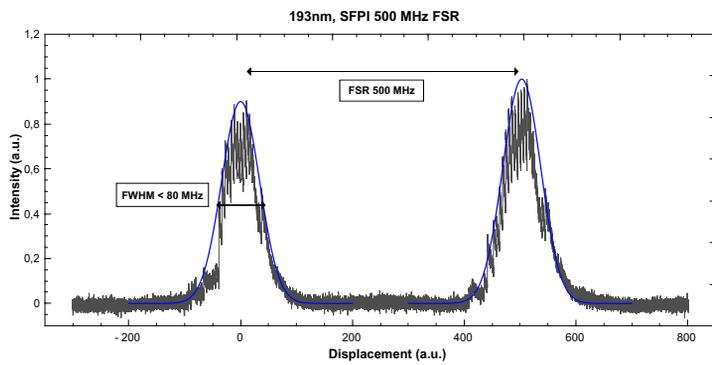

### long term stability

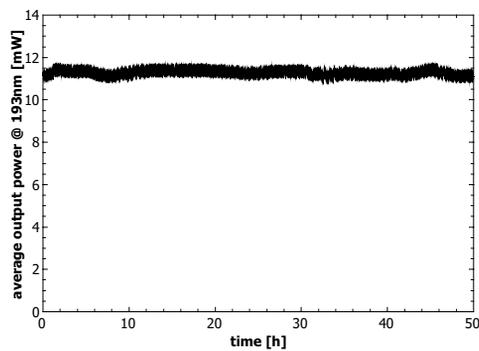

## Dimensions Laser Head

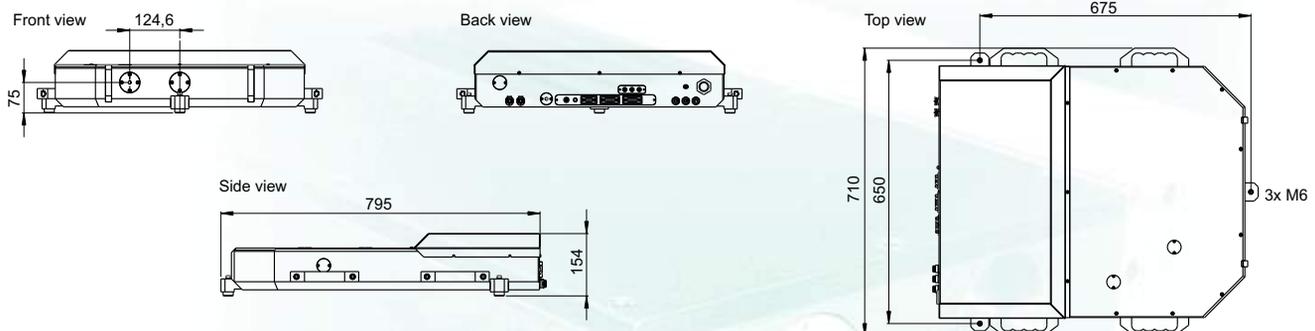

Visible and/or invisible laser radiation. Avoid eye or skin exposure to direct or scattered radiation.  
Class 4 laser ( IEC-825)



Xiton Photonics GmbH  
Kohlenhofstrasse 10  
D-67663 Kaiserslautern  
Germany

Tel.: +49 (0)631 414 9944-0  
Fax: +49 (0)631 414 9944-9  
sales@xiton-photonics.com  
www.xiton-photonics.com