




**单模-多模宽带转换器**

<b>特点</b>					
Centralized Cladding Splicing 集中包层拼接					
Permanent Splice 永久性熔接					
Low Splicing Loss 低熔接损耗					
Automatically-Spliced 自动拼接					
<b>应用</b>					
易于使用					
可接多种接头					
避免不同模式延迟					
符合现有的布线方式					
<b>参数</b>					
Parameter		Unit	Premium	A Grade	
Bandwidth		nm	All Wavelength		
Insertion Loss	Max	dB	0.5	1	
Operating Power	Max	W	5		
典型光谱					

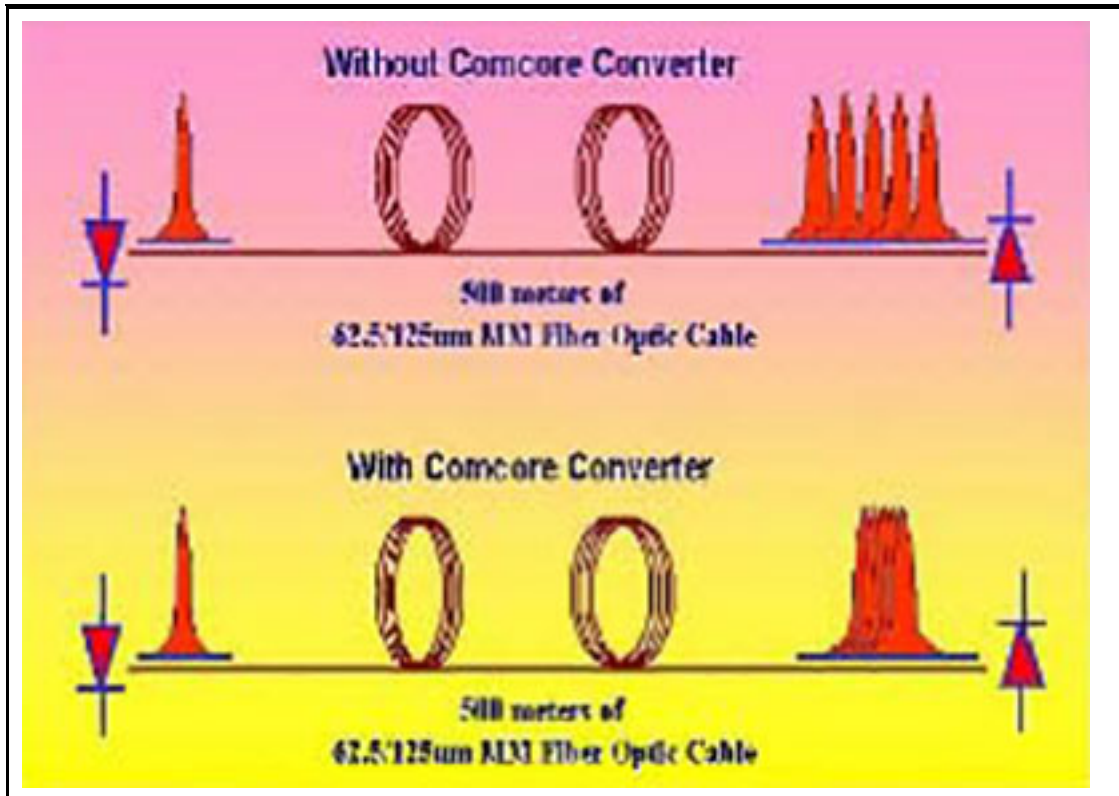

订购信息

S	M	M	M	0	0	Pigtail	Package	Fiber Length	Input Fiber Type	Output Fiber Type	Input Connector	Output Connector



AOE TECH CO., LIMITED

						<b>S =</b> 250μm bare fiber <b>M=900μm</b> loose tube <b>L=3mm</b> cable <b>R=2mm</b> cable	<b>A=S11</b> <b>D=M1</b>	<b>0=0.5m</b> <b>1=0.75m</b> <b>2=1.0m</b> <b>3=1.5m</b> <b>4=2.0m</b> <b>S=Specify</b>	<b>1=SMF-28e</b>	<b>2=50/125μm</b> <b>3=62.5/125μm</b>	<b>0=None</b> <b>1=FC/PC</b> <b>2=FC/SPC</b> <b>3=FC/APC</b> <b>4=SC/SPC</b> <b>5=SC/APC</b> <b>6=ST</b> <b>7=FC/UPC</b> <b>8=SC/UPC</b> <b>9=MU</b> <b>A=LC</b> <b>B=SC/PC</b> <b>C=LC/UPC</b> <b>D=LC/APC</b>	<b>0=None</b> <b>1=FC/PC</b> <b>2=FC/SPC</b> <b>3=FC/APC</b> <b>4=SC/SPC</b> <b>5=SC/APC</b> <b>6=ST</b> <b>7=FC/UPC</b> <b>8=SC/UPC</b> <b>9=MU</b> <b>A=LC</b> <b>B=SC/PC</b> <b>C=LC/UPC</b> <b>D=LC/APC</b>
Note:1. 波长可定制												