







Small liquid pumps

BIG performance

For In-Vitro Diagnostics



Perfection In Every Drop

A variety of pumps are required in clinical chemistry, haemostasis analysis, immunology and microbiology to dose reagents, dispense bodily fluids, clean needles, and remove residues. Whatever type of pump you need for in-vitro diagnostics, there is only one supplier that offers them all: Gardner Denver.

LOWER COSTS, GREATER ACCURACY


In-vitro analysis typically involves expensive reagents. Thanks to their high-precision dosing, our pumps make sure that only the necessary amount of reagent is used. This not only saves costs but also prevents process errors. For accurate dispensing of bodily fluids, there's no better choice than TriContinent syringe pumps.

EASY TO USE, BUILT TO LAST

Our pumps' fast, thorough aspiration capabilities help you easily to transfer analyzed liquids from the analysis chamber or cuvette to the waste container – without leaving any residues or wasting any time. And, thanks to their proven durability, they support reliable analysis for an exceptionally long time. For quick repairs, we also offer convenient service kits for replacement of critical components in diaphragm or peristaltic pumps.














In-Vitro Analysis Fluid Path

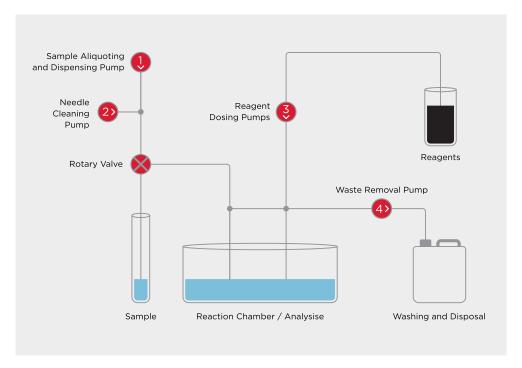

LIQUID PUMPS

- ① Sample aliquoting and dispensing: Sample is dispensed into the reaction chamber with extreme precision
- Needle cleaning: After contamination with disinfectant, needle is flushed at high pressure to remove all residues
- Reagent dosing: Accurate dosing of reagents to the reaction chamber

MIXED MEDIA

4) Waste removal: Residual liquid from the reaction chamber is removed and transferred to the disposal tank. Pumps are capable of handling gas / liquid mixtures



Gardner Denver offers a complete range of pumps for all in-vitro diagnostics applications. Since reliability is vital in this field, our pumps are designed to ensure high-precision dosing. The exact volume of reagent is used for each application, thus minimizing errors and costs.

ADVANTAGES OF GARDNER DENVER PUMPS FOR IN-VITRO DIAGNOSTICS

- ✓ High-precision dosing prevents process errors and reduces reagent costs
- ✓ Fast, thorough aspiration performance for easy, residue-free liquid transfer
- Outstanding durability for reliable, cost-effective analysis
- Convenient service kits available for quick repairs

SELECT THE OPTIMAL PUMP FOR YOUR APPLICATION



GDT 1210

Products of Thomas by Gardner Denver

Liquid diaphragm pump: waste removal



GDT 6311

Liquid diaphragm pump: needle cleaning



GDT 6410 / 6420

Liquid diaphragm pump: waste removal



GDT LMF

Liquid linear diaphragm pump: reagent dosing



GDT 7006

Gas diaphragm pump: waste removal



GDT SR 10 / 30

Peristaltic pump: reagent dosing



GDT SR 25

Peristaltic pump: reagent dosing

Products of TriContinent by Gardner Denver



C3000 / 24000

TriContinent Syringe Pump: sample aliquoting and dispensing, diluent / reagent delivery



Air-Z Premier

TriContinent Air Displacement Pump: sample aliquoting and dispensing, reformatting



Air-Z Flex

Sample aliquoting and dispensing, reformatting



Air-Z Mini

Sample aliquoting and dispensing, reformatting



Air-Z Legacy

Sample aliquoting and dispensing, reformatting




Base Pump Series

Sample aliquoting and dispensing, diluent / reagent delivery



Prime Series Syringes

Sample aliquoting and dispensing, diluent / reagent delivery





GDT 1210 Liquid Diaphragm Pump



Recommended applications



Description

- · Liquid diaphragm pump for smooth, continuous transfer of liquid
- · Free flow rate: 180 250 mL/min
- · Pressure: continuous pressure up to 1 bar
- · Suction height: up to 6 mWc

Benefits

- Smooth, continuous flow with minimized pulses
- ✓ Bubble-free transfer of liquids
- ✓ Full compatibility with corrosive and abrasive media
- ✓ Flexible design for customized solutions



GDT 6311 Liquid Diaphragm Pump



Recommended applications



Description

- · Liquid diaphragm pump for transfer of liquids under pressure
- · Free flow rate: 150 mL/min
- · Pressure: continuous pressure up to 5 bar
- · Suction height: up to 4 mWc

- ✓ Linear controllability of flow against pressure
- ✓ High reliability and lifetime even with higher pressures
- ✓ Full compatibility with corrosive and abrasive media
- ✓ Flexible design for customized solutions



GDT 6410 / 6420 Liquid Diaphragm Pump



Recommended applications



Description

- · Liquid diaphragm pump for smooth, continuous transfer of liquids
- Free flow rate: 600 mL/min (per head)
- · Pressure: continuous pressure up to 1 bar
- · Suction height: up to 3 mWc

Benefits

- ✓ Smooth, continuous liquid flow with minimized pulses
- Bubble-free transfer of media
- ✓ Excellent reliability and durability even with corrosive and abrasive media
- ✓ Flexible design for customized solutions
- ✓ Reliable transfer of air / liquid mixtures
- ✓ Spare part kit for self-service available



GDT LMF Liquid Linear Diaphragm Pump



Recommended applications



Reagent dosing

Description

- · Liquid linear diaphragm pump for reliable continuous dosing against low pressures
- Free flow rate: 185 300 mL/min
- · Pressure: continuous pressure up to 0.5 bar
- · Suction height: up to 2 mWc

- ✓ Cost-efficiency
- ✓ Quiet operation









GDT 7006 Gas Diaphragm Pump



Recommended applications



Description

- · Gas diaphragm pump for high end vacuum and performance stability
- · Flow rate up to 8ml/sec of water mixed with air
- · Intermittent pressure up to 2 bar
- · Intermittent vacuum up to 90%

Benefits

- ✓ Low sound and vibration over performance range
- ✓ High evacuation speed
- ✓ Performance reliability over lifetime
- Configurable design for customized solutions



GDT SR 10 / 30 Peristaltic Pump



Recommended applications



Reagent dosing

Description

- · Peristaltic pump for accurate dosing of media
- Flow rate: 16 55 mL/min

- ✓ Simple handling, tubing is easy to exchange
- ✓ Robust and durable design
- Reliable dosing capabilities
- ✓ Flexible choice of motor and tubing





GDT SR 25 Peristaltic Pump



Recommended applications



Description

- · Peristaltic pump for accurate dosing of media
- Flow rate 0.2 746 mL/min

Benefits

- ✓ Simple handling, tubing is easy to exchange
- ✓ Robust and durable design
- Excellent dosing capabilities
- ✓ Flexible choice of motor and tubing



C3000 / 24000 TriContinent Syringe Pump



Recommended applications

- Sample aliquoting and dispensing
- Diluent / reagent delivery

Description

- · High quality stepper motors and lead screws with up to 192,000 steps per full stroke
- Syringe volumes from 50 μL to 12.5 mL
- · Wide variety of rotary shear valves
- · State-of-the-art communication capabilities

- ✓ Highest precision and accuracy in pipetting volumes and flow rates
- ✓ Very wide dynamic range
- ✓ Longevity design for maintenance free operation
- ✓ Plug and play installation and operation







Air-Z Premier TriContinent Air Displacement Pump



Recommended applications



Sample aliquoting and dispensing, reformatting

Description

- · High quality stepper motors and lead screws for high resolution
- Total volumes 1000 μL
- Tip volume ranges of 20 μL, 50 μL, 200 μL, 1000 μL
- · State-of-the-art communication capabilities
- · Pressure sensor and capacity sensor
- Active tip drop

Benefits

- ✓ Very high pipetting performance concerning precision and accuracy
- ✓ Wide dynamic range from few microliters to 1 mL
- ✓ Liquid Level Detection (LLD) by pressure, capacity or both (hybrid)
- ✓ Clogged tip detection
- Active tip drop allows simple reuse of tips



Air-Z Flex



Recommended applications



Sample aliquoting and dispensing, reformatting

Description

- 50 μL, 250 μL and 1,000 μL volumes available
- With or without control electronics, including pressure sensor
- · Vertical or horizontal orientation available
- · Up to 15 units can be addressed individually

- ✓ High-resolution encoder for step loss detection
- ✓ Space saving compact size
- ✓ Universal tip adapter for use on multiple volume tips
- ✓ Pressure sensor for clogged tip detection





Air-Z Mini



Recommended applications



Sample aliquoting and dispensing, reformatting

Description

- 50 μL volume
- · Most economical design for low-duty cycle applications
- · Designed for easy installation and replacement
- Imprecision and inaccuracy of < 1% full stroke

Benefits

- ✓ Lightweight for smaller point of care systems
- ✓ Compact design for small applications
- ✓ Can be nested on 18 mm centers for multiple dispenses



Air-Z Legacy



Recommended applications

Sample aliquoting and dispensing, reformatting

Description

- Pump Volume options of 200 μ L, 1,000 μ L, 2,000 μ L and 5,000 μ L
- · Optional proximity switch
- · Optional motion control board available

- ✓ Instrument ready designs
- ✓ Borosilicate glass & PTFE wetted surfaces for long life
- Compatible with most motion controllers









Base Pump Series

Recommended applications

- Sample aliquoting and dispensing
- Diluent / reagent delivery

Description

- · Configurations with or without valves
- Syringe sizes from 250 μL to 10 mL
- · Imprecision and inaccuracy < 1% full stroke

Benefits

- ✓ Economical solution without electronics
- ✓ Proven design with Borosilicate glass and PTFE wetted parts
- ✓ Simple two way valve for easy connection



Prime Series Syringes



Recommended applications

- Sample aliquoting and dispensing
- Diluent / reagent delivery

Description

- · 3 cm and 6 cm lengths
- · PTFE or UHMWPE seal options
- Syringe sizes from 50 µL to 25 mL

- Compatible with most industry standard pumps
- ✓ Proven designs using high grade seal material and Borosilicate 3.3 glass
- Custom designs available to meet your needs



HEADQUARTERS

EMEA

Gardner Denver Thomas GmbH

Livry-Gargan-Str. 10 82256 Fürstenfeldbruck Germany

Tel: +49 8141 2280 0 Fax: +49 8141 8892136

thomas.de@gardnerdenver.com

THOMAS

Americas

Gardner Denver Thomas, Inc. 1419 Illinois Avenue Sheboygan, WI 53081

USA

Tel: +1 920 457 4891 Fax: +1 920 451 4276 td.usa@gardnerdenver.com

Asia Pacific

Gardner Denver Thomas Pneumatic Systems (Wuxi) Co., Ltd.

No. 1 New Dong An Road Shuofang Town Wuxi, Xinwu District Jiangsu 214142

China

Tel: +86 510 6878 2217 Fax: +86 510 6878 2200 thomas.cn@gardnerdenver.com tricontinent.cn@gardnerdenver.com

Global Websites

www.trythomaspumps.com www.gd-thomas.com www.tricontinent.com www.welchvacuum.com

China Websites

www.thomas-pump.cn www.tricontinent.cn www.welch-pump.cn