

精密实验室温度计, Enclosedscale 内标示  
蓝色内充物, ACCU-SAFE

- 德国制造
- 适用于校准
- 温度计带序列号和合格证书
- 方形塑料套包装


订货号	测量范围 (°C)	最小分度 (°C)	精度 (°C)	总长度 (mm)	浸入深度 (mm)
1042343S	-10 to +50	0.5	± 0.5	220	to tal
1042344S	-10 to +100	0.5	± 0.5	270	to tal
1042345S	-10 to +150	0.5	± 0.5	350	to tal
1042351S	-10 to +200	0.5	± 0.5	450	to tal
1042604S	-38 to +50	0.2	± 0.4	400	to tal
1042346S	-5 to +50	0.2	± 0.3	350	to tal
1042347S	-5 to +100	0.2	± 0.3	420	to tal
1042352S	-5 to +201	0.2	± 0.4	550	to tal
1042703S	-38 to +50	0.1	± 0.3	550	to tal
1042704S	-30 to +30	0.1	± 0.3	400	to tal
1042353S	-10 to +30	0.1	± 0.2	300	to tal
1042349S	-10 to +50	0.1	± 0.2	420	to tal
1042354S	0 to +100	0.1	± 0.2	550	to tal
1122904S	0 to +51	0.1	± 0.2	400	to tal
1122905S	+47 to +101	0.1	± 0.2	400	to tal
1122906S	+97 to +151	0.1	± 0.4	400	to tal
1122907S	+147 to +201	0.1	± 0.4	400	to tal

精密实验室温度计, STEMFORM 棒式  
蓝色内充物, ACCU-SAFE

订货号	测量范围 (°C)	最小分度 (°C)	精度 (°C)	总长度 (mm)	浸入深度 (mm)
1052105S	-38 to +50	5	± 0.5	320	to tal
1042373S	-10 to +50	5	± 0.5	240	to tal
1042374S	-10 to +100	5	± 0.5	290	to tal
1042375S	-10 to +150	5	± 0.5	370	to tal
1042380S	-1 to +201	5	± 0.5	480	to tal
1042376S	-5 to +50	2	± 0.3	370	to tal
1042377S	-5 to +100	2	± 0.3	440	to tal
1052303S	-38 to +50	1	± 0.3	570	to tal
1042384S	-10 to +30	1	± 0.2	320	to tal
1042379S	-10 to +50	1	± 0.2	440	to tal
1132004S	0 to +51	1	± 0.2	420	to tal
1132005S	+47 to +101	1	± 0.2	420	to tal
1132006S	+97 to +151	1	± 0.4	420	to tal
1132007S	+147 to +201	1	± 0.4	420	to tal

精密实验室温度计, STEMFORM,IP  
蓝色内充物, ACCU-SAFE

订货号	类似 IP-Type	测量范围 (°C)	最小分度 (°C)	精度 (°C)	总长度 (mm)	浸入深度 (mm)
1212008S	8C	0 to +45	0.2	± 0.2	350	65
1212038S	38C	+23 to +27	0.1	± 0.1	270	to tal
1212039S	39C	-1 to +38	0.1	± 0.1	450	to tal
1212042S	42C	-38 to +30	0.5	± 0.5	380	250
1212049S	49C	-15 to +40	0.5	± 0.25	325	to tal
1212050S	50C	+10 to +65	0.5	± 0.25	325	to tal
1212051S	51C	+35 to +120	0.5	± 0.5	325	to tal
1212053S	53C	0 to +80	0.5	± 0.25	325	to tal
1212074S	74C	-35 to +70	0.5	± 0.5 / above 0 ± 0.2	325	61
1212075S	75C	-30 to +80	0.5	± 0.5	325	89
1212076S	76C	+10 to +55	0.5	± 0.25	250	93
1212091S	91C	0 to +110	1	± 0.5	215	44
1212100S**	100C	+78,6 to +81,4	0.05	± 0.1	325	to tal
2212101S	101C	+20 to +150	1	± 1	305	57

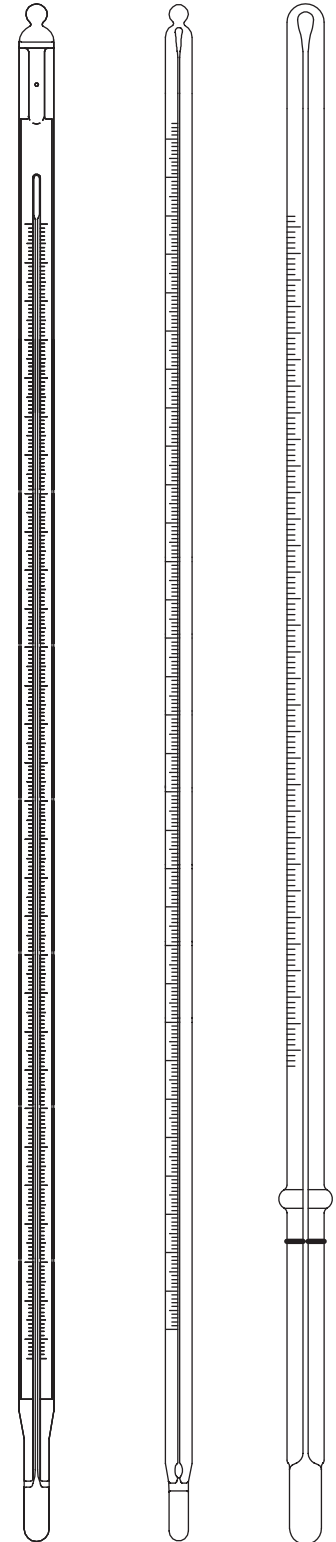

内标示

棒式

棒式 IP

\*\* 温度计在 0°C 有辅助刻度