

Thermo Scientific ARL EQUINOX 3000 Series

X-Ray Diffractometer Powder Diffraction

The Thermo Scientific™ ARL™ EQUINOX 3000 measurements are very fast compared with other diffractometers in that the unique Inel curved detector can measure all diffraction peaks simultaneously. Due to this acquisition in real time, all kinetic studies are facilitated.

The Thermo Scientific™ ARL™ EQUINOX 3500 is an evolution of ARL EQUINOX 3000 model. It is exactly the same configuration except that it works with a bigger radius of curvature detector. So, obtained data have a better resolution.



Environment



Minina



Metallurgy



Education




No scanning required. Measures the whole 2 theta range simultaneously and in real time.

The ARL EQUINOX 3000 is a a research-grade diffractometer with a very high resolution diffraction system providing the user a choice of features including higher resolution detectors, a larger sample area and choice of X-ray sources.


The free space in the sample compartment is very large and will accommodate practically any sample and any sample handling device including furnaces, auto samplers, large assemblies, etc.

Real time acquisition Extremely accurate Easy to use No alignment needed **Very reliable** Superb resolution No maintenance



Specifications

| X-ray source | Generator: 3500 W (60kV / 60mA - Option 30kV limitation) Standard sealed X-ray tube : Cu, Co, Mo, radiation |
|-------------------|--|
| Detector | Curved Position Sensitive X-ray Detector, CPS120 Curvature radius: 250mm Acquisition in real time over 120° 2Theta Option: CPS590 (500mm, 90° 2Theta – EQUINOX 3500) |
| Goniometric table | No moving parts Acquisition in asymmetric mode |
| Sample holders | Fixed, with or without sample rotation Reflection or transmission mode Sample changer: 6 or 30 positions Thin layer attachment |
| Special camera | Heating camera: low and high temperature Humidity chamber, Electrochemistry cell |
| Optic | Monochromatic |
| Computer | Windows© 8, 7 Vista, XP |
| Software | Real time diffractogram display Multiple and automatic recording Peak search Deconvolution with several shapes Phase identification and quantification Degree of crystallinity determination Cell parameters, crystallite size, lattice strain Crystal structure analysis Transition phase Thin film (reflectometry, etc.) Rietveld analysis Free open database for search match Option: ICDD PDF2 or PDF4 databases |
| Power | 30-32A / 208-230V / 50-60 Hz |
| Cooling water | Flow: \approx 3,5 L/min - T°C: $\approx \!\! 18$ to 25 °C |
| Dimensions | 1565 mm H x 750 mm D x 1040 mm W EQUINOX 3000 1815 mm H x 744 mm D x 1206 mm W EQUINOX 3500 |
| | |

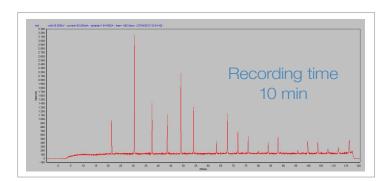

LaB6 powder sample recorded on ARL EQUINOX 3000 in reflection mode.

www.thermoscientific.com/xrd

©2016 Thermo Fisher Scientific Inc. All rights reserved. Microsoft and Windows are registered trademarks of Microsoft Corporation. ISO is a trademark of the International Standards Organization. All other trademarks are the property of Thermo Fisher Scientific and its subsidiaries. Specifications, terms and princing are subject to change. Not all products are available in all countries. Please consult your local sales representative for details.

Africa +43 1 333 50 34 0 Australia +61 3 9757 4300 Austria +43 810 282 206 Belgium +32 53 73 42 41 Canada +1 800 530 8447 China +86 21 6865 4588

Denmark +45 70 23 62 60 DEurope-Other +43 1 333 50 34 0 Finland/Norway/Sweden +46 8 556 468 00 France +33 2 38 80 45 45 Germany +49 6103 408 1014

India +91 22 6742 9494 Italy +39 02 950 591 Japan +81 45 453 9100 Latin America +1 561 688 8700 Middle East +43 1 333 50 34 0 Netherlands +31 76 579 55 55



New Zealand +64 9 980 6700 Russia/CIS +43 1 333 50 34 0 Spain +34 914 845 965 Switzerland +41 61 716 77 00 UK +44 1442 233555 USA +1 800 532 4752







You want to perform transmission analysis? Choose either the Sample Spinner for reflection and transmission analysis on powder samples or the capillary sample holder for Transmission mode analysis depending on your needs.





You need to analyze several powder samples a day? Optimize your throughput with the 6 or 30 position sample changer.







HTK1200N

TTK450

This system allows you to work with controlled temperature or atmosphere chamber. Anton Paar and other suppliers chambers can be availabledepending on your needs.