


CUTTING

MOUNTING

POLISHING

HARDNESS & MICROSCOPY



MECATOME T202

POWERFUL. EFFICIENT. ROBUST.

The new generation precision
cutting machine

BY PRESI



innovate.

THE PRESI SIGNATURE. ALL AROUND THE WORLD.





MECATOME T202, the new generation precision cutting machine

BY PRESI


Precision cutting machine.

The MECATOME T202 is a cutting machine which distinguishes itself by its robustness and compact dimensions. It can cut a wide range of materials, from the softest to the hardest ones.

Maximum performance.

With a maximum speed of 4000 RPM, the MECATOME T202 works with diamond cut-off wheels as well as resinoids ones. It is perfect for using fine grinding wheels for the highest precision cuts.

CUTTING ENVELOPE*

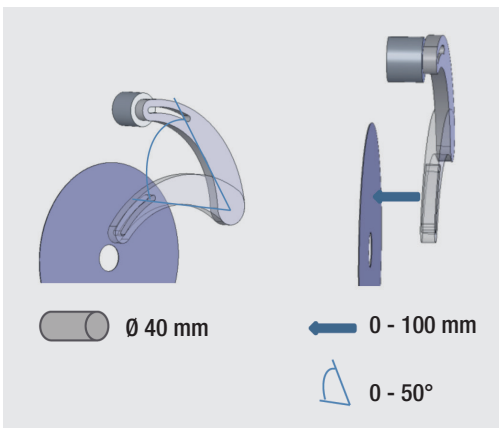

* This illustration of the cutting envelope of the MECATOME T202 is to show the maximum theoretical capacity only. The actual capacity in practice will depend on the sample geometry and its physical properties.

Cutting mode

The MECATOME T202 allows two cutting modes:

- Manual
- By gravity (weight, counter-weight)

UNRIVALED ENGINE POWER

The powerful brushless motorization of the MECATOME T202 allows to work with constant torque over the whole speed range from 100 to 4000 RPM. The entire PRESI experience is concentrated in this most complete cutting machine on the market in its category.



Touchscreen

- LCD color TFT display 4,3", 16/9
- Ergonomic and intuitive user interface
- Easy to use thanks to the micrometric display of lateral movement
- Many features, changes and adjustments of cutting parameters



PROTECTION HOOD LOCK FOR MAXIMUM SECURITY

The hood, made of metal frames, locks as soon as the engine starts and only unlocks when the grinding wheel stops.


LED Lighting

Improves brightness and facilitates visual control during operation.



Sample carrier arm

The sample arm, adjustable in lateral position and in rotation, allows the attack of the sample from all angles.



Emergency stop button

Convenient and quick access to the machine emergency stop button to immediately stop its operation.

TECHNICAL FEATURES



MECATOME T202 cutting machine - Ref. 51750

HOOD

Type	Metal frame and PETG
Safety	Lock during the cycle

MOTORIZATION - POWER SUPPLY

Power	960 W
Power supply	110 - 230 V single phase 50 / 60 Hz
Engine control	Brushless motor control board

CUT-OFF WHEELS

Type of cut-off wheels	Resinoid and diamond
Cut-off wheel size range	from Ø 75 to Ø 200 mm
Rotation speed	from 100 to 4000 RPM
Arbor size	12,7 mm

CONTROL

Control interface	4.3 TFT color touch screen, 16/9
Security access	Can activate password protection
Programmability	Up to 3 programs

CUTTING

Cutting mode	Manual or by gravity (weight / counter-weight)
X axis range	100mm X-axis movement of the sample carrier arm
Holders	Sample carrier arm accepts a wide variety of holders

LUBRICATION - COOLING

Pump and tank	Integrated - Capacity 3,5L
Type of lubrication	Pump lubrication
Method of directing pumped coolant	A single alignable nozzle
Type of filtration	100µ washable fabric filter

ERGONOMICS

Spray nozzle for cleaning	Integrated
Inside lighting	LED tube interior lighting IP68
Dimensions hood closed (in mm)	W = 535 / H = 410 / D = 590
Dimensions hood opened (in mm)	W = 535 / H = 750 / D = 590
Weight	55 kg

ACCESSORIES

V shaped
sample chuck



Ref. 51715

Vice chuck
longitudinal cuts



Ref. 51717

Chuck for small
samples (vice type)



Ref. 51713

Orientable
chuck




Ref. 51156

Chuck for
cylindrical sample



Ref. 51714

Irregular shaped
sample chuck



Ref. 51716

Mini screw
vice



Ref. 51722

Vice chuck longitudi-
nal cuts (53 mm)



Ref. 51718

Set of 5 aluminium plates
for samples sticking



Ref. 51162 - 51163

Set of
2 flanges



Ref. 51710 - 51711 - 51712

STANDARD RESINOID CUT-OFF WHEELS

* to be used with reduction ring ref. 51324

REF.	DESIGNATION	DIAMETER	MATERIALS	HARDNESS
01040	Type A - Abrasive Al_2O_3	Ø 100 x 0,3 x 12,7 mm	Low carbon, mild and extra mild	100 - 350 Hv
01046 01043 01002	Type AO - Abrasive Al_2O_3	Ø 125 x 0,5 x 12,7 mm Ø 150 x 0,5 x 12,7 mm Ø 200 x 1,6 x 25,4 mm*	Treated steels, stainless steels, refractory metals, alloyed cast irons	300 - 500 Hv
01001	Type AOF II - Abrasive Al_2O_3	Ø 200 x 0,8 x 25,4 mm*	Rubber bonded cut-off wheel, sintered steels, hard metal layers	80 - 300 Hv
01041	Type C - Abrasive SiC	Ø 100 x 0,3 x 12,7 mm	Aluminium, copper and alloys, non ferrous metals, titanium and alloys	30 - 350 Hv
01005	Type MNF - Abrasive SiC	Ø 200 x 1,6 x 25,4 mm*	Aluminium, copper and alloys, non ferrous metals, titanium and alloys	30 - 350 Hv
01060	Type S - Abrasive SiC	Ø 180 x 0,5 x 25,4 mm*	Treated steels, with fragile coatings, tough materials	450 - 700 Hv

DIAMOND CUT-OFF WHEELS

* to be used with reduction ring ref. 01092

REF.	DESIGNATION	DIAMETER	MATERIALS	BOND
02030 02031 02034 02036 02055 02038	Type LM	Ø 75 x 0,3 x 12,7 mm Ø 100 x 0,3 x 12,7 mm Ø 125 x 0,5 x 12,7 mm Ø 150 x 0,6 x 12,7 mm Ø 175 x 0,7 x 12,7 mm Ø 200 x 0,9 x 32 mm*	Ceramics, composites, tungsten carbide, alumina, sintered carbides, minerals, concretes.	Metallic bound : very polyvalent cut-off wheel, normal concentration, to cut hard materials.
02057 02060 02063 02064 02066 02040	Type LM+	Ø 75 x 0,3 x 12,7 mm Ø 100 x 0,3 x 12,7 mm Ø 125 x 0,5 x 12,7 mm Ø 150 x 0,6 x 12,7 mm Ø 175 x 0,7 x 12,7 mm Ø 200 x 0,9 x 32 mm*	Ceramics (large sections), tungsten carbide, silicon carbide, plasma deposit, mounted samples, refractory materials, minerals, concretes.	Metallic bound : high concentration disc to cut hard materials.
02058 02033 02035 02037 02067 02041	Type LR	Ø 75 x 0,5 x 12,7 mm Ø 100 x 0,5 x 12,7 mm Ø 125 x 0,5 x 12,7 mm Ø 150 x 0,6 x 12,7 mm Ø 175 x 0,7 x 12,7 mm Ø 200 x 0,9 x 32 mm*	Composites, plasma deposit, ceramics, electronic components.	Resin bound : high concentration disc, advised when you want the best cutting quality. To cut hard and fragile materials.

CBN CUTTING DISCS

* to be used with reduction ring ref. 51331

02059 02062 02050 02065 02056 02039	Type NB	Ø 75 x 0,5 x 12,7 mm Ø 100 x 0,5 x 12,7 mm Ø 125 x 0,5 x 12,7 mm Ø 150 x 0,6 x 12,7 mm Ø 175 x 0,7 x 12,7 mm Ø 200 x 0,9 x 32 mm*	Cast irons, treated steels, hard and high speed steels.	Resin bound : high concentration disc of boron nitride for cutting the materials mentioned here.
--	---------	--	---	---



FIND OUT MORE AT
WWW.PRESI.COM

