

For Harsh Process

Kashiyama
Vacuum Solutions

SDE-TX Series

SDE Series Focused on Harsh Process Durability

01
FEATURE

Vertical Screw;
Durable against Deposit.

02
FEATURE

Material & Temp. setting;
Durable against Corrosion.*1



Harsh Process Application Example

Metal-Etch

SA-CVD

Metal-CVD

PE-CVD

LP-CVD

ALD


Major Products

| Spec./ Products | SDE120TX | SDE303TX | SDE603TX | SDE1203TX | SDE20M12TX | SDE30M12TX |
|-----------------------------|---------------------------------|-------------|-------------|-------------|-------------|--------------|
| Max. pumping speed[L/min]*2 | 1,500 | 5,000 | 10,000 | 20,000 | 30,000 | 45,000 |
| Ultimate pressure[Pa]*2 | 1.3 | 0.5 | | | | |
| Supply voltage(50/60Hz) | 3Phase AC200 ~ 220V, 380 ~ 480V | | | | | |
| Dimensions[mm]W*H*L*3 | 370*501*690 | 400*905*760 | 400*905*760 | 400*905*900 | 460*960*900 | 500*960*1020 |

*1) Contact us about applicable gas. *2) Without N2 purge. *3) Package size. Dimensions vary by specification.

* Contact us about international standard compliance. Spec. & name of products are subject to change without prior notice.

S-P Curve

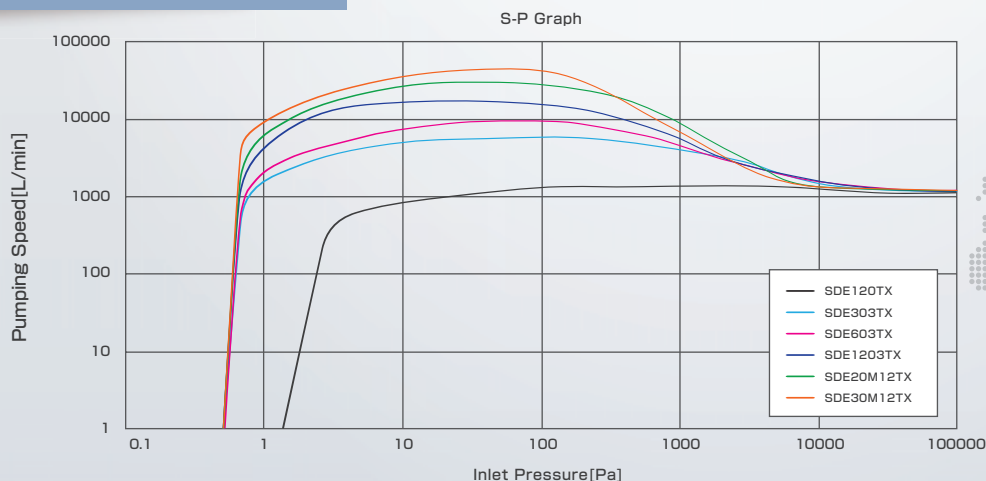

*S-P curves vary by combination.

Contact us

KASHIYAMA INDUSTRIES, LTD.

URL www.kashiyama.com

Japan
[Head Office] TEL +81-267-67-9009
FAX +81-267-67-9015
Email sales@kashiyama.co.jp

USA
TEL +1-510-979-0070
Email sales@kashiyama.com

Korea TEL +82-31-678-1500

China TEL +86-21-3895-4599

Taiwan TEL +886-4-2462-9599