

# SDE Series

Standard type for harsh process

**01**

FEATURE

Available up to  
200kL/min.

**02**

FEATURE

Best for  
large wafer and FPD.

**03**

FEATURE

Durable to  
various processes.



## Major Products


Spec. / Products*1	SDE1220	SDE20M20	SDE30M20	SDE4060	SDE4030M20	SDE8060	SDE804060
Max. pumping speed [L/min]*2	20,000	30,000	50,000	60,000	80,000	120,000	190,000
Ultimate pressure [Pa]*2	0.5			0.8	0.5	0.8	0.5
Supply voltage (50/60Hz)	3Phase AC200 ~ 220V, 380 ~ 480V						
Dimensions [mm] W*H*L*3	400*780*930	450*950*1000	450*950*1000	750*1200*1600	800*1580*1320	850*1220*1600	1000*1980*1850

\*1) Smaller than 20,000L/min pumps are also available. \*2) Without N2 purge.

\*3) Package size. Dimensions vary by specification.

\* Contact us about international standard compliance. Spec. & name of products are subject to change without prior notice.

## S-P Curve

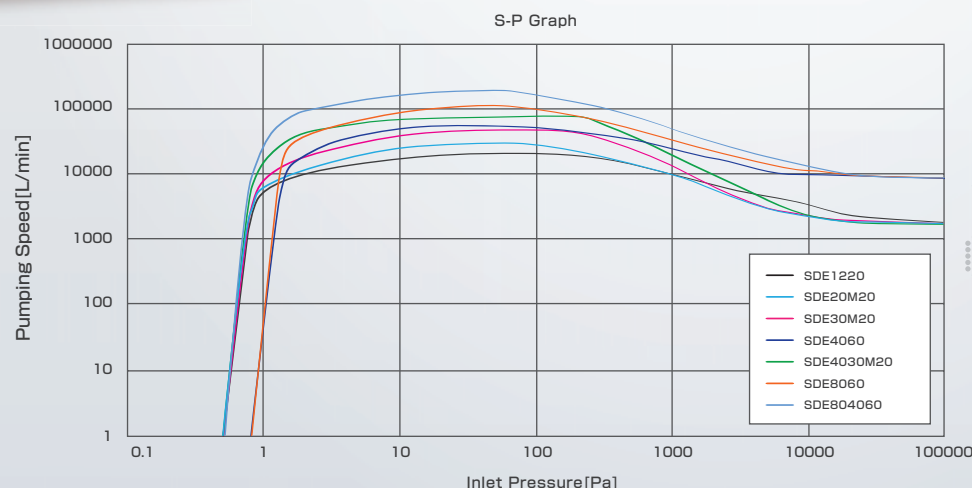

## Contact us

KASHIYAMA INDUSTRIES, LTD.

URL [www.kashiyama.com](http://www.kashiyama.com)

Japan  
[Head Office] TEL +81-267-67-9009  
FAX +81-267-67-9015  
Email [sales@kashiyama.co.jp](mailto:sales@kashiyama.co.jp)

USA TEL +1-510-979-0070  
Email [sales@kashiyama.com](mailto:sales@kashiyama.com)

Korea TEL +82-31-678-1500

China TEL +86-21-3895-4599

Taiwan TEL +886-4-2462-9599