

The Jupiter 5000 Series is a 50kV, 50W packaged X-ray tube designed for applications where high flux density and continuous operation are important.

Utilizing our highly stable and high intensity X-ray tube technology, the Jupiter 5000 Series is ideal for medical imaging applications and most industrial inspection and non-destructive testing applications that require high resolution, including PCB assembly, battery, plastic, metal and mechanical parts inspection.

The 5000 Series features a stainless steel, lead-lined package that is filled with dielectric oil, which enables the unit to provide maximum X-ray shielding and heat dissipation. The design includes high voltage and filament connectors, making it ideal for plug and play operation.

The Jupiter 5000 Series is available in a wide range of spot sizes, targets and price points to meet your needs.



Benefits


- Wide operating range enables optimal image contrast
- Stable X-ray output delivers high precision measurements
- Low attenuation beryllium window ensures high transmission of low energy X-rays
- Fully-shielded compact package eliminates X-ray leakage and easily integrates into your system

Applications

- Medical Imaging
- Printed circuit board and electronic device inspection
- Non-destructive testing of plastic, metal and mechanical parts
- Thickness gauging
- Analytical XRF

Specifications	
Operating Voltage Range:	10-50kV
Maximum Power:	50W
Maximum Beam Current:	1.0mA
Focal spot size:	P/N 93089: 50µm P/N 93095: 55µm
Maximum Filament Current:	1.7A
Filament Voltage:	2.0V (nominal)
Focus to Object Distance (FOD):	See diagram next page
Window material and thickness:	Be @ 127µm
Cone of illumination (unobstructed):	23°
Window diameter (unobstructed):	11.43mm (.450")
Target material:	See product ordering table next page
Target angle:	12°
Stability:	0.2% 4 hours
Polarity:	Grounded cathode
Ambient operating temperature:	0°C to 40°C
Cooling:	150 CFM forced air recommended. Case temperature should not exceed 46°C in continuous duty applications. Case temperature may be allowed to reach 50°C in intermittent duty cycles such as benchtop instruments. Contact sales@oxinst.com to discuss your specific cooling applications.
Shielding:	0.25mR/hr @ 2" (except at HV connection)
Dimensions:	180mm L x Ø70mm (7.09" L x Ø2.76")
Weight:	2.26kg (5.0 lbs)
Storage Conditions:	-10°C to 55°C Barometric Pressure: 50-106kPa; Humidity: 10-90% (no condensation) Condensation on Be window will cause window corrosion, vacuum loss and X-ray tube failure

Jupiter 5000 Series Radiation Shielded X-ray Tube

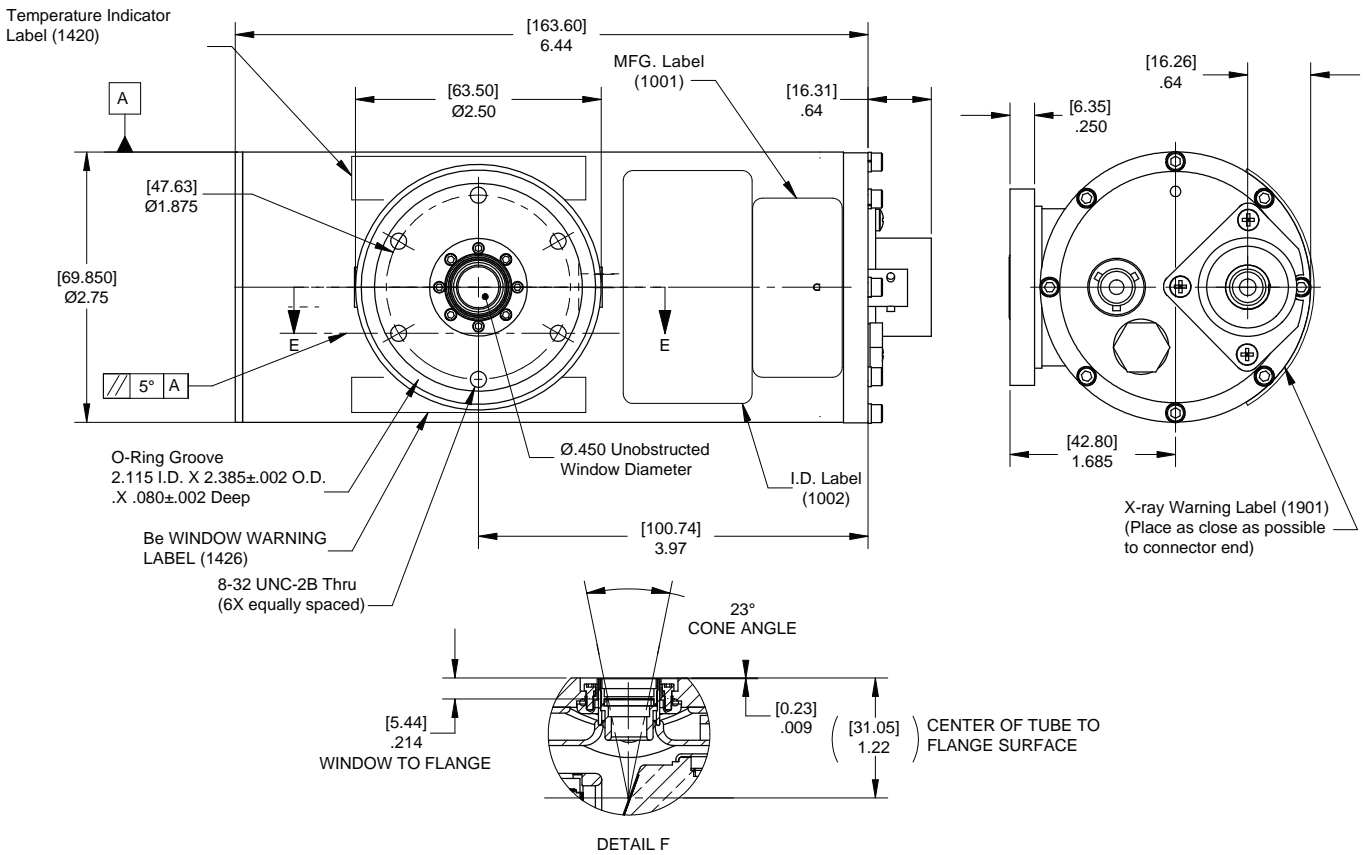

Notes

1. USE AN AS568A-139 O-RING IN MOUNTING PLATE GROOVE IF REQUIRED
2. DIMENSIONS ARE IN INCHES. DIMENSIONS [] ARE IN MM

Product Ordering Table

Target Material	Voltage	Power
W (93089)	10-50kV	50W
Mo (93095)	10-50kV	50W

visit www.oxford-instruments.com/xt or xray-sales@oxinst.com for more information

This publication is the copyright of Oxford Instruments plc and provides outline information only, which (unless agreed by the company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or regarded as the representation relating to the products or services concerned. Oxford Instruments' policy is one of continued improvement. The company reserves the right to alter, without notice the specification, design or conditions of supply of any product or service. Oxford Instruments acknowledges all trademarks and registrations.
© Oxford Instruments plc, 2018. All rights reserved. Document reference: Part no: DS062 - May 31, 2018



The Business of Science®



X-ray Technology
360 El Pueblo Road
Scotts Valley, CA 95066, USA

Phone: +1 (831) 439-9729
Fax: +1 (831) 439-6050
Email: xray-sales@oxinst.com