

THE RIGHT ANALYZER FOR YOUR APPLICATION!

TM2000 TRACE OXYGEN ANALYZER

QUICKLY RESPONDS TO PROCESS CHANGE

The TM2000 net oxygen analyzer protects industrial processes by quickly responding to changes using an industry-proven zirconium oxide sensor. It operates within a wide range of 0.1 ppm to 100% oxygen, and can accurately respond from atmosphere to low ppm oxygen levels in just seconds. In addition, the TM2000 can detect excess combustibles process upsets in the presence of very low ppm oxygen readings. This unique benefit is particularly important in cryogenic gas generating processes, where the TM2000 can distinguish between an oxygen upset condition and an excess combustibles upset condition.

The TM2000 is supported by the state-of-the-art Series 2000 controller, with input and output electronic transient protection and a standard weatherproof housing. The controller can be housed separately from the sensor.

KEY BENEFITS

- RS-485 serial communications, 0 - 20/4 - 20 mA current outputs, and digital alarms for systems integration.
- Save money on calibration gases by calibrating with percent gases, and then reading accurately in low ppm ranges.
- Modular design for easy upgrades and field service.
- User-friendly, menu driven software that includes helpful system status text messages allows you to begin using the TM2000 quickly. Advanced software diagnostics and on-line help further simplify the use of the TM2000.
- The zirconium oxide sensor will not fail to a zero oxygen reading, as with other sensor technologies. Therefore, your process is always protected.
- Optional sample bypass improves response times and keeps sensor inlet purged of dead volume.



TM2000 Sensor




Series 2000 Control Unit

APPLICATIONS

- Cryogenic gas generating systems
- Nitrogen purity systems
- Blanket gas analysis
- Inert gas purity
- Welding atmospheres
- Air separation
- Atmospheric oven control
- Glove box applications

DIMENSIONS

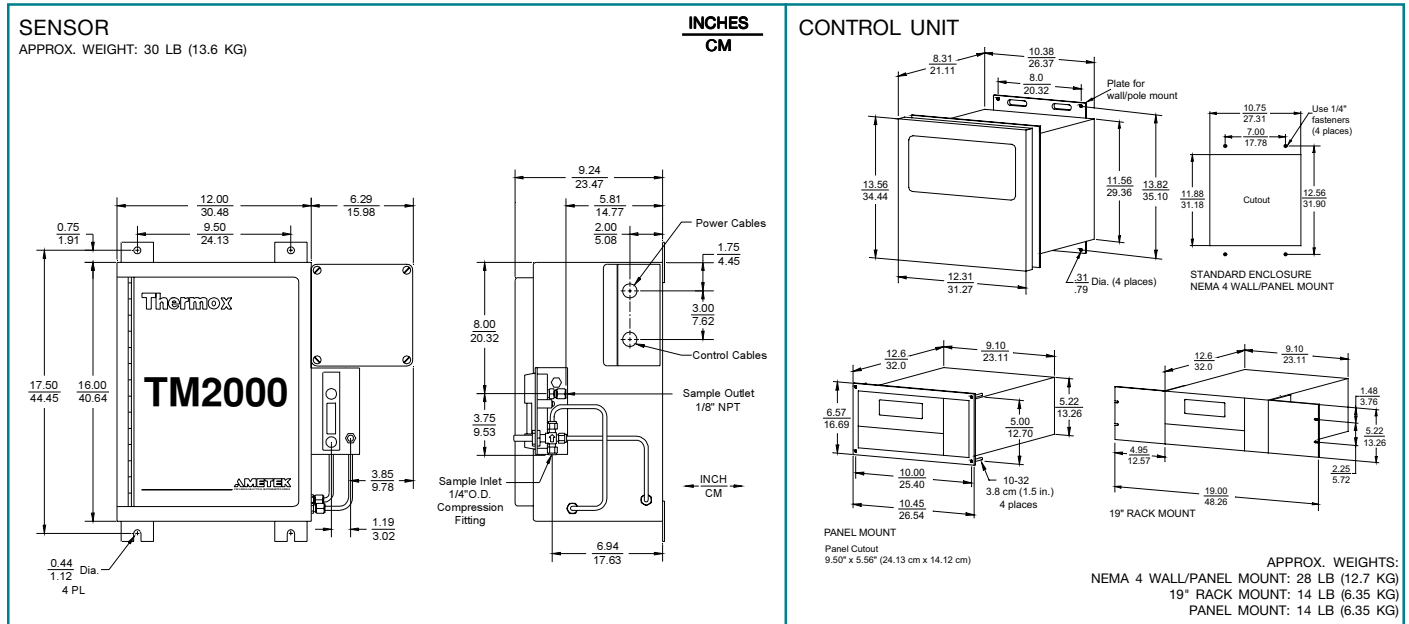

SENSOR

Operating Range: 0.1 ppm O₂ to 100% O₂

Accuracy:

Percent: ± 1% of reading or .02% O₂ absolute, whichever is greater
ppm: ± 2% of reading or 0.5 ppm O₂ absolute, whichever is greater

Response Time: less than 5 seconds at 0.6 L/min. (1.3 scfh) over one decade

Repeatability: Percent: ± 0.5% of reading or 0.1% O₂ absolute, whichever is greater;
ppm: ± 0.5% of reading or 0.1 ppm O₂ absolute, whichever is greater

Ambient Temp.: -18°C to 50°C (0°F to 122°F)

Max. Inlet Temperature: 71°C (160°F)

Sample Flow: 0.1 to 1.0 L/min (0.2 to 2.1 scfh)

Power Requirements: 115 VAC ±10%, 50/60 Hz. 288 VA (230 VAC optional)

Calibration Gas Flow Rate: 0.1 to 1.0 L/min (0.2 to 2.1 scfh) (0.6 L/min recommended)

Zero Gas: From 0.1 ppm to 10% O₂, balance N₂

Span Gas: Minimum one decade above zero gas (10 times greater)

SERIES 2000 CONTROL UNIT

Display: Four-line by 20-character vacuum fluorescent. Displays combinations of oxygen (0.1 ppm O₂ to 100%, autoranging), time and date, cell temperature, user programmable text, thermocouple mV or cell mV. Password protection, programmable pressure compensation and context-sensitive help are also provided.

Analog Output: Two isolated linear current outputs. Assign O₂, cell temperature, thermocouple mV, or cell mV. Each output can be 4-20 mA, 0-20 mA, 20-4 mA, 20-0 mA, and is fully scalable. Hold or track during calibration and select degree of damping. Maximum load 1200 ohms.

Alarms: Two independent oxygen alarms, each high or low selectable. One alarm can be assigned as oxygen, calibrate or verify. Set relays to energize or deenergize on alarm..

Contact Rating: 1A, 30V max. noninductive load, AC or DC

Diagnostics: Watchdog timer and service alarms. System test for A/D, RAM, EEPROM and keypad. Display line 4 reserved for full text error and diagnostic messages. Twenty entry exception log for automatically detected system events.

Communications: RS-485, 2-way addressable

Ambient Temp.: -10°C to 50°C (14°F to 122°F)

Enclosure: Standard weatherproof NEMA 4 (IP 56) wall/panel mount. Optional GP (General Purpose) wall mount, GP 19" rack mount, GP panel mount, or stainless steel weatherproof NEMA 4X (IP 56) wall/panel mount. All are UL Listed for NEC Class I, Division 2 areas. Purged and explosion-proof versions also available.

Calibration: Store last calibration and verification data. Selectable calibration gas run time and process recovery time. Timed automatic calibration with optional remote calibration unit. Oxygen cell lifetime extender. Single gas verify that analyzer is within calibration limits with alarm.

Power Requirements: Nominal 95-230 VAC, ±10%, 47-63 Hz, 75 VA max.

System Compliance

EMC Directive 89/336/EEC
Low Voltage Directive 73/23/EEC

One of a family of innovative process analyzer solutions from AMETEK Process Instruments. Specifications subject to change without notice.

USA - Pennsylvania
150 Freeport Road
Pittsburgh, PA 15238
Ph. 412-828-9040
Fax 412-826-0399

USA - Delaware
455 Corporate Blvd.
Newark, DE 19702
Ph. 302-456-4400
Fax 302-456-4444

AMETEK®
PROCESS INSTRUMENTS
www.thermox.com

© 2003, by AMETEK, Inc. All rights reserved.
1203PDF (P410)

SUPPORT LOCATIONS

USA - Texas
Ph. 281-463-2820
Fax 281-463-2701

CHINA - Beijing
Ph. 86-10-85262111
Fax 86-10-85262141

CHINA - Shanghai
Ph. 86 21 6426 7049
Fax 86 21 6426 7054

FRANCE
Ph. 33 1 30 68 69 20
Fax 33 1 30 68 69 29

GERMANY
Ph. 49 21 59 91 36 0
Fax 49 21 59 91 36 80

MIDDLE EAST - Dubai
Ph. 971-4-881 2052
Fax 971-4-881 2053

SINGAPORE
Ph. 65-6484-2388
Fax 65-6481-6588

CANADA
2876 Sunridge Way N.E.
Calgary, AB T1Y 7H9
Ph. 403-235-8400
Fax 403-248-3550

MANUFACTURING LOCATIONS
REGISTERED
ISO 9001
MANAGEMENT SYSTEM

