

1-Cylinder Small Diaphragm Pump


To the promotion of gaseous media at technology (A-2)

Made in Germany – ISO 9001 certified




hyco®

more information: PB-19


www.hyco.de



Technology (A-2)



Technical Data:	MP38-H?-W26	MP38-H3,6-W26	MP38-H5-W26
Free flow l/min	in planning	4,0	6,0
Final vacuum mbar		270	170
Final pressure (abs.)	2 bar		
Pump heads	1		
Hose coupling, suction / pressure	G 1/8"		
Mains requirement - Frequencies	230V-50 Hz or 12VDC or 24VDC		
Motor power / r.p.m.	0,09 KW / 2600 min ⁻¹		
Ex-Motor	not possible		
Noise level dB(A)	49 to 57		
Permissible gas admission temp. °C	+ 5 to + 45		
Permissible ambient temperature °C	+ 5 to + 45		
Dimensions mm L x W x H	105 x 61 x 83		
Weight ca. kg	1,2		
Impermeable to gas	1 x 10 ⁻³ mbar x l/s (unexamined)		

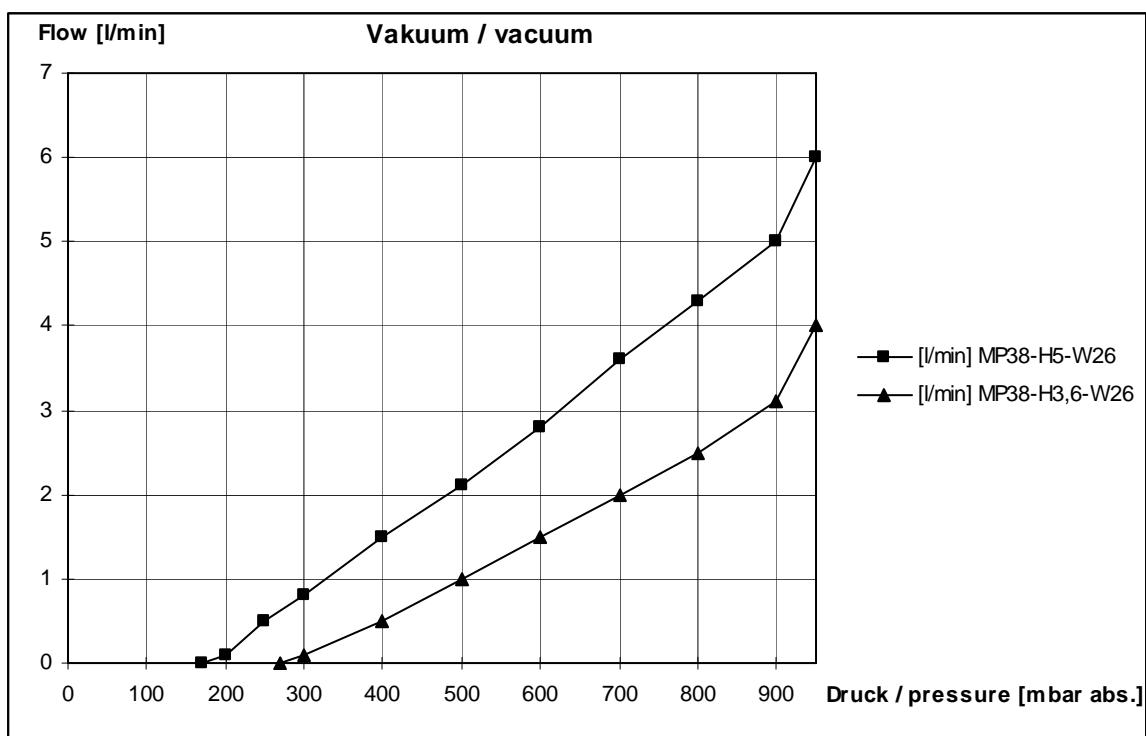

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901

Internet: www.hyco.de • eMail: info@hyco.de