


# MshOt 明美

## MIF-BGU-BD

倒置三色LED数显荧光模块

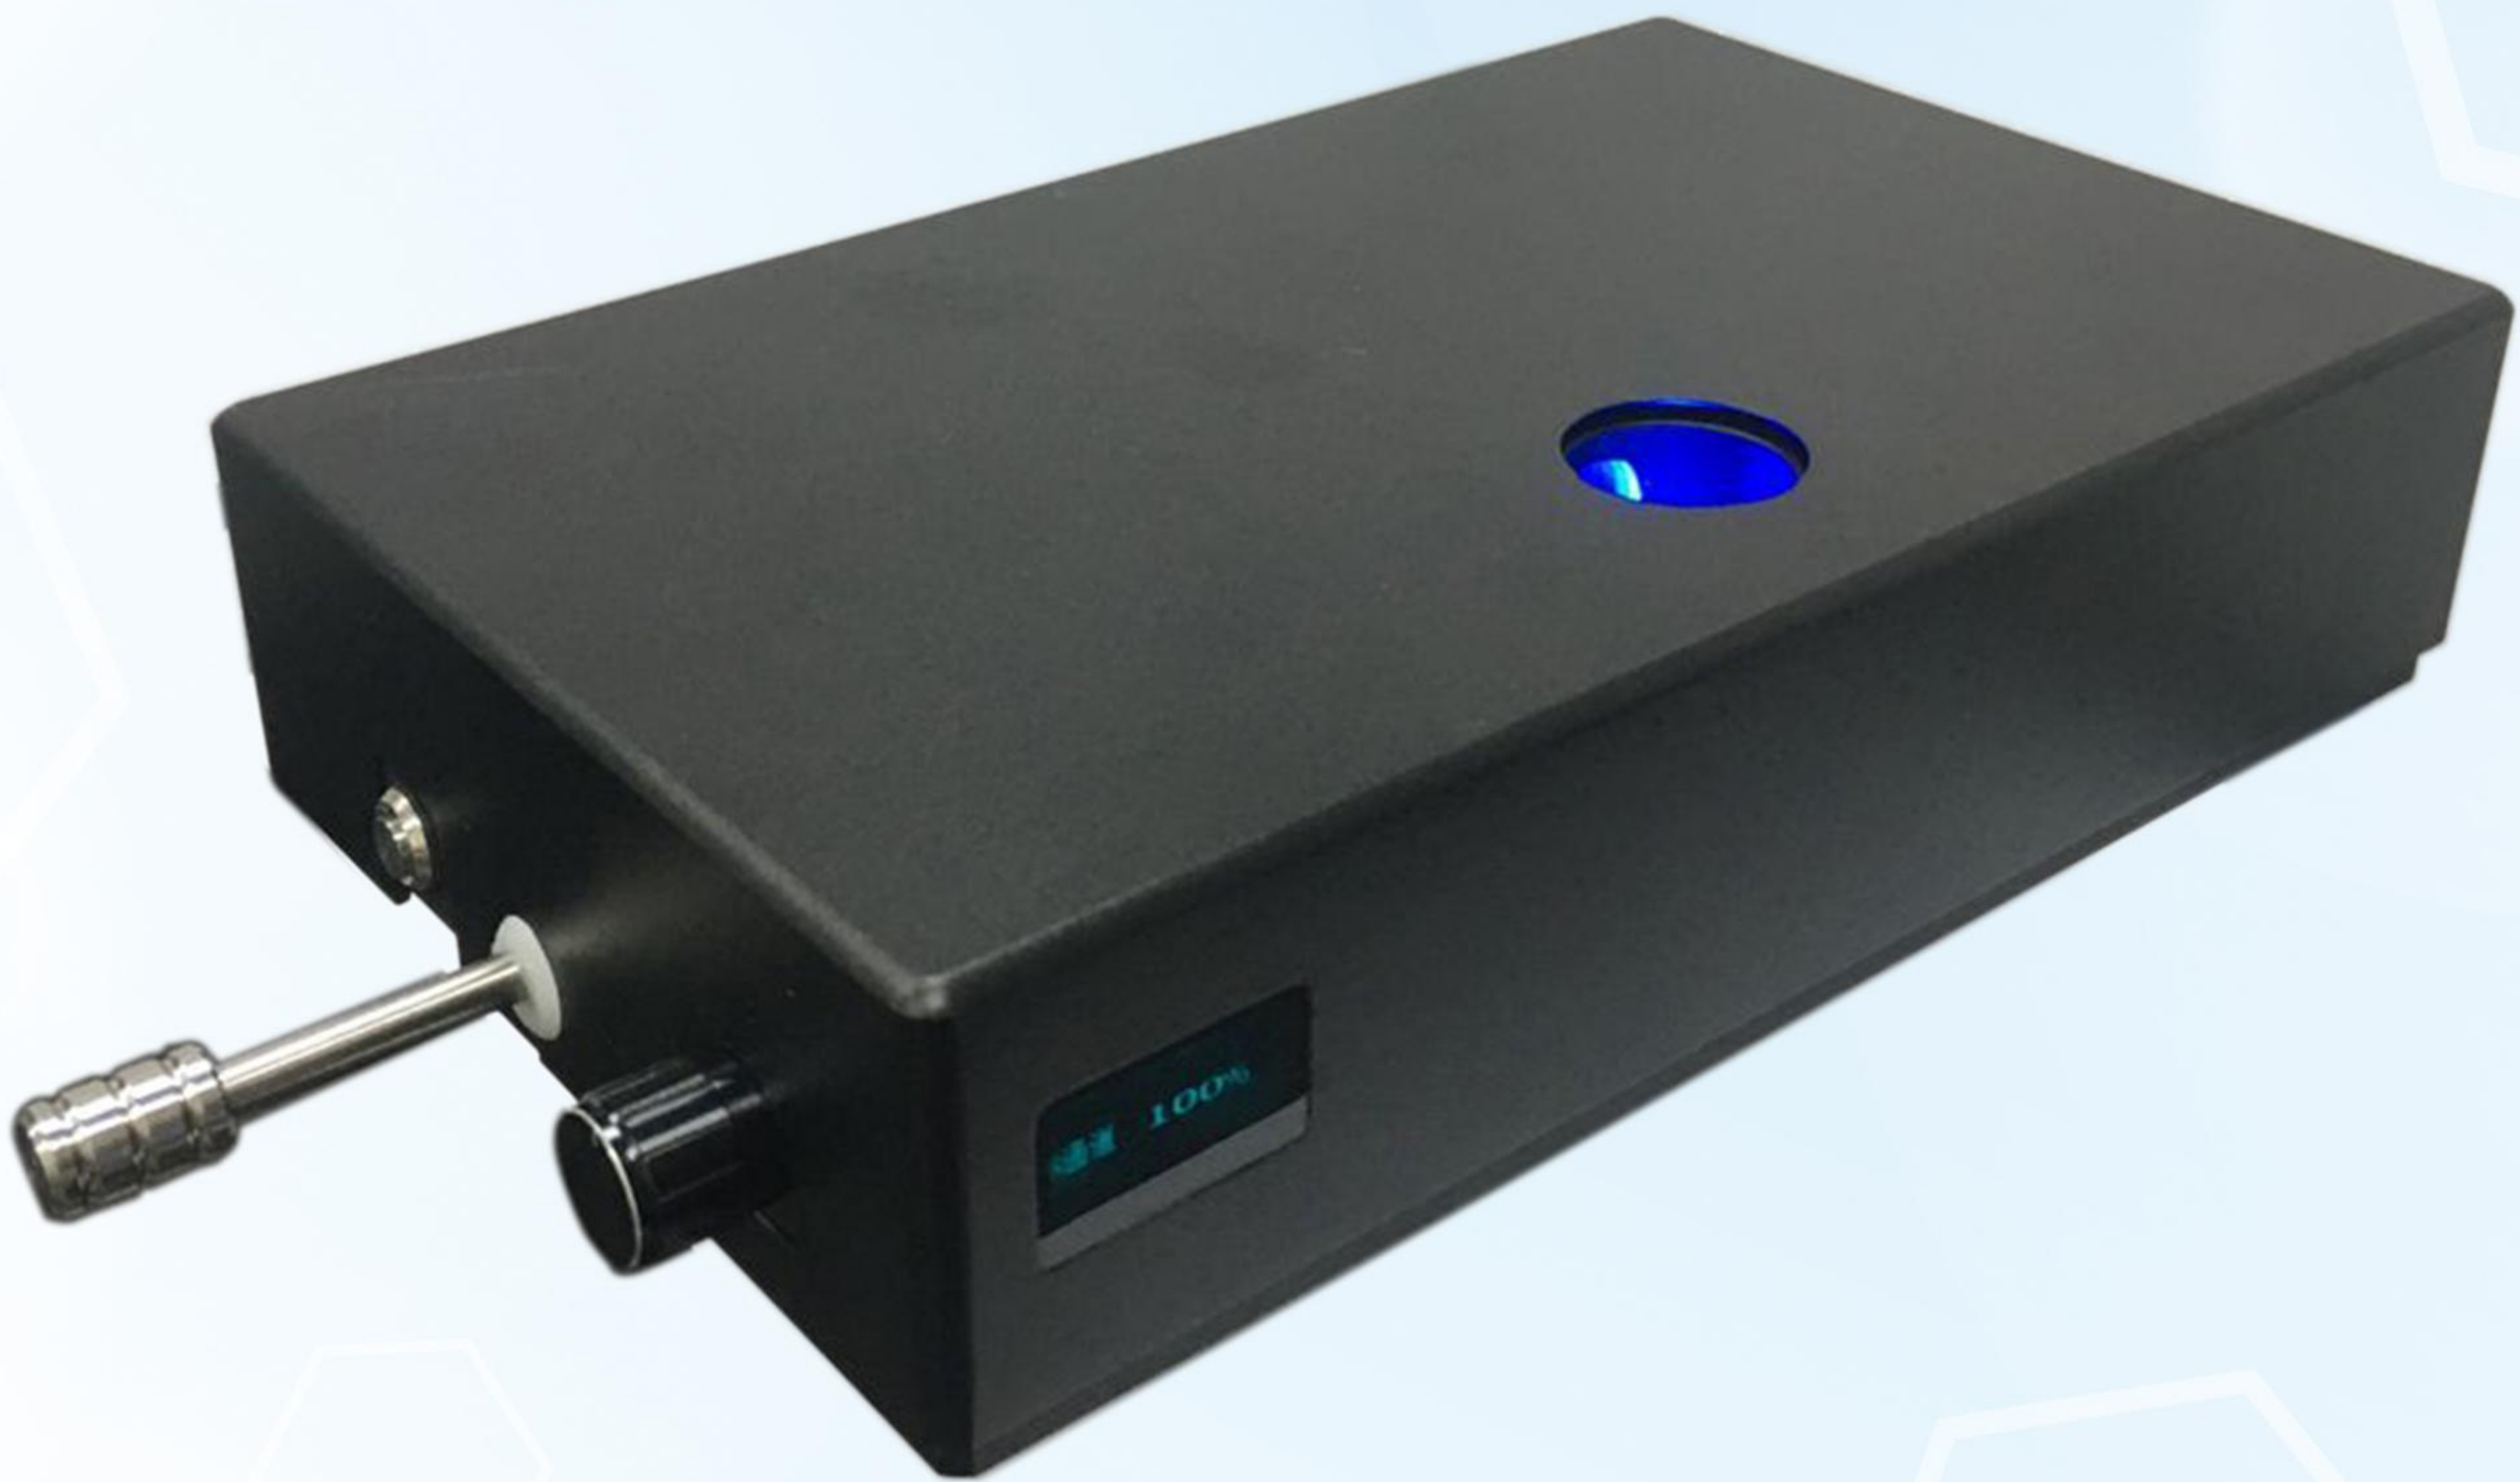

特点:

- 编码式调节旋钮电位器，可无级调节亮度
- 数字化显示屏，波段及亮度百分比可视化
- 三色四通道结构设计，波段切换稳定顺畅
- 具有亮度记忆功能，研究工作更精准便捷



MIF-BGU-BD

产品参数

滤光组	B	B BP : EX:475/30nm; DM:505nm; EM:530/40nm
		B LP : EX:475/30nm; DM:500nm; EM:520 nmLP
	G	G BP : EX:530/40nm; DM:565nm; EM:605/55nm
		G LP : EX:530/40nm; DM:570nm; EM:590 nmLP
	U	UV BP: EX:375/30nm; DM:415nm; EM:460/50nm
		UV LP: EX:355/50nm; DM:400nm; EM:420 nmLP
	Y	Y LP : EX:560/40nm; DM:600nm; EM:610 nmLP
激发光源	高亮LED光源	
观察方式	荧光、明场切换	
输入电源	DC 12V2A	

