




ECO PHYSICS nCLD 844 CMhr

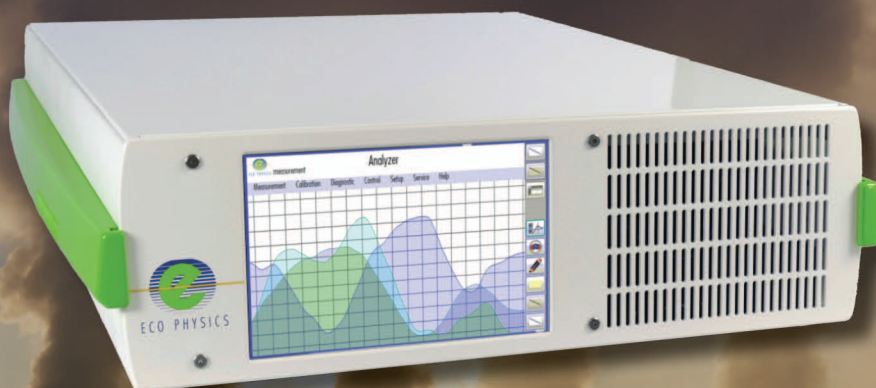

APPLICATION EXAMPLES

- Burners and boilers
- Manufacturers of gas turbines
- Certification and calibration
- DeNOx Plants and SCR
- Refining of fuels and lubricants
- Assessment of ammonia slip
- Research and development

The nCLD 844 CMhr analyzer is the next generation in high precision nitrogen oxide measurement. Unique in speed and reliability, the nCLD 844 CMhr is modular designed and capable of simultaneously measuring NO, NO₂, NO_x, NH₃ and NO_x-amines from hot and humid gas sources without additional cooler. It features a dual inlet option for assessing two different sources at once. The new and intuitive graphical user interface "GUI" also individually displays and connects to other instruments' data.

Straight From the Source

The nCLD 844 CMhr includes everything that is needed for measuring NO, NO₂, NO_x, NH₃ and NO_x-amines in unpreconditioned gas samples. The integrated hot tubing enables the instrument to analyze hot and moist sources and the electro-mechanical bypass system balances out pressure variations occurring in the sample flow. Furthermore, the analyzer is adaptable to numerous non-standardized applications. Dual sample gas inlet is an option that allows measuring two different sources simultaneously, enabling comparison of the samples. Calibration and adjustment of the unit runs quick and automatically with all necessary data available anywhere and at any time.

User Friendliness with "GUI"


The new touch sensitive graphical user interface "GUI" enables the user to individually adjust the instrument operation and data management according to his/her needs and applications. The bright 8" monitor gives a clear overview and allows numerical and graphical display of values. Multiple digital in- and outputs guarantee a maximal connectivity for your remote operation, control and maintenance of the nCLD 844 CMhr, ensuring unsurpassed precision and reliability.

Compact, Modular and Intelligent!

The nCLD 844 CMhr is manufactured in a new compact and modular layout, in which each essential component of the chemiluminescence analyzer hosts its own CPU and interacts with other CPUs by BUS-communication. This assembly increases accessibility and serviceability by reducing wiring and piping. The measurement principle conforms to the standard method for NO_x-detection in stationary source emissions (EN 14792).

- Rapid system integration and rack mounting
- Compact and modular design
- Virtually maintenance free even in continuous operation
- Four freely selectable measuring ranges (with dual inlet: two per channel)
- Choice between different types and numbers of converters

Graphical user interface "GUI" for individual analyzer operation and data management

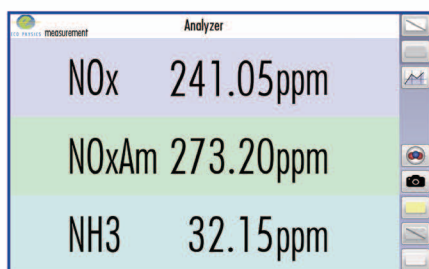

SPECIFICATIONS

nCLD 844 CMhr

Measuring ranges	four freely selectable ranges from 0.5–500 ppm with option d two per channel
Min. detectable concentration*	0.025 ppm
Noise at zero point (1σ)*	0.0125 ppm
Lag time	<1 sec
Rise time (0–90%)	<1 sec
Temperature range	5 - 40 °C
Humidity tolerance	5 - 95% rel. h (non-condensing, ambient air and sample gas)
Sample flow rate	1.2 l/min
Dry air flow rate	230ml/min
Input pressure	600-1200 mbar abs.
Dry air use for O ₃ generator	internally generated (no external supply gas required)
Power required	400 VA (incl. membrane pump and ozone scrubber)

Supply voltage	100–230 V/50–60 Hz
Interface	USB(2x), HDMI, Bluetooth, RS232 (w/o 9pin connector), LAN, WLAN
Dimensions	height: 133 mm (5¼ ") width: 450 mm (19 ") with molding: 495 mm depth: 540 mm (21.2 ")
Weight	23 kg (51 lb)
Delivery includes	nCLD 844 CMhr analyzer, power cable, FTDI-RS232-USB cable, manual
Standard	nCLD 844 CMhr <ul style="list-style-type: none"> · catalyst converter · metal converter · hot tubing · electro-mechanical pressure regulation
Options	<ul style="list-style-type: none"> · dual sample gas inlet · steel converter · dual channel NO_x/NO_x · USB-RS232 9pin connector · 4 - 20 mA into 500 Ωmax.; · 0 - 10 V
Analog output (External Box)	

* depending on filter setting
ECO PHYSICS reserves the right to change these specifications without notice.

© ECO PHYSICS AG, Switzerland 2018-1/10

FLOW DIAGRAM

