

DG Series **High Capacity Mechanical Force Gauge**

Specification Sheet SS-FM-3002-0904 September 2004

The CHATILLON® DG Series mechanical force gauge is ideal for a wide range of force testing applications up to 500 lbf (2.5 kN). Based on our popular DPPH Series force gauge, the DG Series features a larger, 2.25-inch dial for improved resolution and readability, peak hold button, durable plastic housing, universal mounting plate, ergonomic shape and improved accuracy of ±0.5% of full scale. The DG gauge is an excellent, economical solution for tensile or compression testing.

The DG Series may be used as a hand-held device or equipped with an optional handle set for two-hand operation. It is ideal for test stand applications, and when combined with the MT500 Series mechanical test stand, offers you a versatile, economic test sytem with a capacity of up to 500 lbf (2.5 kN).

The DG Series features an an easy to read concentric dial that measures clockwise only. Dial rotates 360-degrees for taring. A peak hold switch captures peak readings and can be easily and quickly returned to zero. A mechanical overload feature protects the gauge from damage. Available in lbf, kgf or N units of measure. DG Series gauges come complete with protective carrying case and a set of stainless steel attachments. A Certificate of Calibration with NIST Data is supplied standard.

Features

- Eight Capacities
- Tensile (Pull) and Compression (Push) Testing
- Intrinsically Safe
- Tare Ring
- Peak Load Switch
- Universal Mounting
- NIST Calibration with Data
- 2 Year Warranty

Specifications


Accuracy: **Overload Capacity:** Maximum Overload: Tare Capacity: **Dial Resolution: Deflection: Instrument Weight: Shipping Weight:**

+0.5% of Full Scale 110% of Rated Capacity 150% of Rated Capacity 10% of Rated Capacity 0.5% of Full Scale 10mm (.394 inches) at Full Scale **Operating Temperature:** 40°F to 110°F (5°C to 45°C) 4.7 lbs (2.12 kg) 8.4 lbs (3.80 kg)






Dimensions

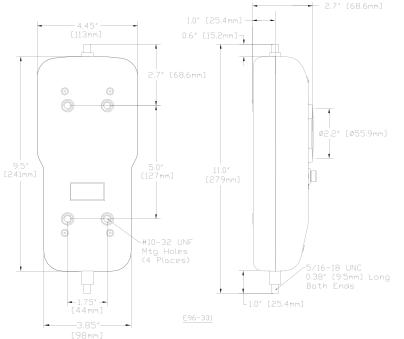



DG Series force gauge shown with optional Handle Set Assembly (p/n SPK-DG-Handle).



Optional Handle Set Assembly (p/n SPK-DG-Handle).

Ordering

Decimal Dial (LBF)

Model	Capacity x Resolution
DG-200	200 x 1.0 lbf
DG-300	300 x 1.5 lbf
DG-400	400 x 2.0 lbf
DG-500	500 x 2.5 lbf

Decimal Dial (KGF)

Model	Capacity x Resolution
DG-100KG	100 x 0.50 kgf
DG-250KG	250 x 1.25 kgf

S.I. Dials (Newtons)

Model	Capacity x Resolution
DG-1000N	1000 x 5.0 N
DG-2500N	2500 x 12.5 N

Accessories

Standard Accessories

Description
Chisel Point
Point
Notch
Flat
Hook, Stationary
Extension Rod, 6-inch
Carrying Case
Operator's Manual

Optional Accessories

Part No.	Description
ML3868	Hook, Swivel
NC002500	Hook, with Clasp
SPK-DG-Handle	Handle Set Assembly
SPK-DG-TCM-TCD	Adapter, TCM/TCD Stand
SPK-DG-HTC	Adapter, HTC Stand
SPK-DG-TT	Adapter, TT Tester
SPK-MT-0005	Adapter, MT Stand
SPK-DG-LTCM	Adapter, LTCM-100 Stand



France

Americas

AMETEK TCI Division 8600 Somerset Drive Largo, Florida 33773 United States of America Tel +1-727-536-7831 Tel +1-800-527-9999 Fax +1-727-539-6882 Email chatillon.fl-lar@ametek.com

Visit Us on the Worldwide Web at:

www.chatillon.com

AMETEK Lloyd Instruments SA 3 avenue des Coudriers Zone d'Activite de l'Observatoire 78180 Montigny-Le-Bretonneux France Tel +33-1-3057-4774 Fax +33-1-3057-5033

Email general@lloyd-instruments.com

Germany AMETEK GmbH Rudolf-Diesel-Strasse 16 D-40670 Meerbusch Germany Tel +49-0-2159-9136-70 Fax +49-0-2159-9136-80 Email apie@ametek.dr

Singapore AMETEK Singapore Pvt. Ltd. 10 Ang Mo Kio Street 65 #05-12 Techpoint Singapore 569059 Tel +65-484-2388 Fax +65-481-6588 Email aspl@ametek.com.sg

United Kingdom AMETEK Lloyd Instruments Ltd. Forum House, 12 Barnes Wallis Rd Segensworth East Fareham Hampshire PO15 5TT United Kingdom Tel +44-0-1489-574221 Fax +44-0-1489-885118 Email uk-far.general@ametek.co.uk

For the authorized Chatillon Distributor or Manufacturer's Representative near you, go to www.chatillon.com

