


# PGL Precision Balances



PGL balances combine the solid construction and fundamental features of a high-precision top loading balance with the versatility of a portable balance. A full-metal die cast housing, sealed front panel, and readabilities of 1mg, 10mg, and 0.1g make the PGL ideal for applications that demand both high precision and ruggedness. A built-in rechargeable battery and AC adapter/charger allow you to take your PGL balance anywhere, even out to the field.

With over 35 years of experience in the production of weighing instruments you can trust Adam for quality products that offer a range of features designed for a variety of applications.

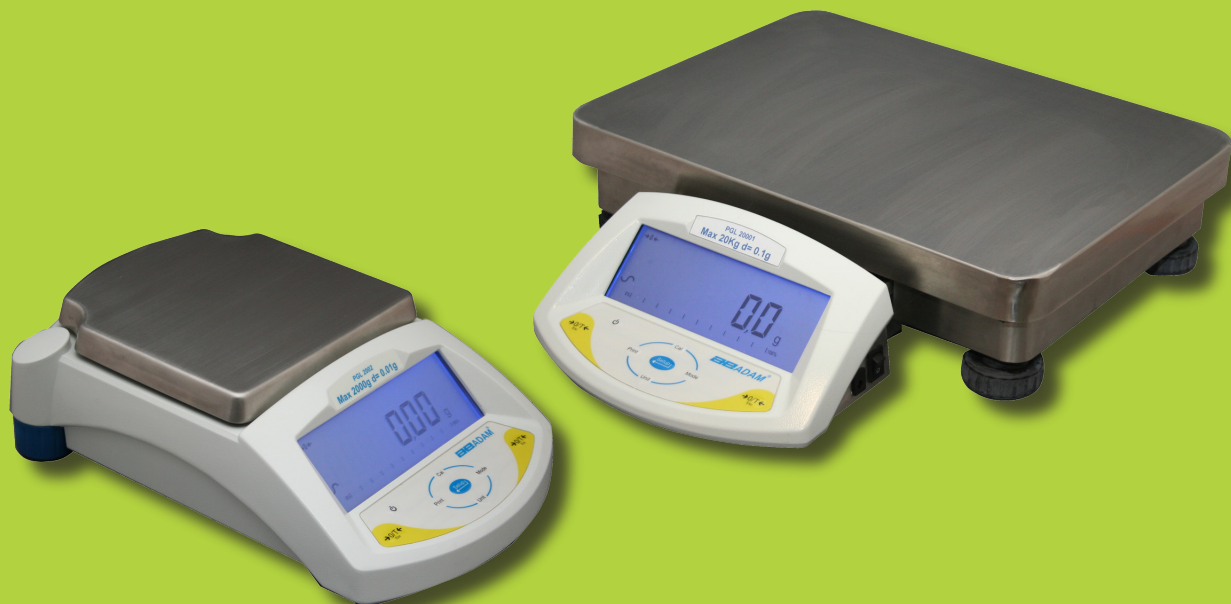

**ADAM**<sup>®</sup>  
**THE RIGHT BALANCE**  
Speed, Performance, Value

## PGL Highlights:

The large back lit display with capacity tracker is easy to read and shows you how much weighing range that is left when using the tare function, ensuring that you do not overload the balance.

Navigating the built in applications and weighing modes is easy with the intuitively designed keypad. Access to the main functions is quick and a special lock out feature allows the supervisor to set up access to all or certain functions so users do not inadvertently change the settings.

Communications are easy with the built in bidirectional RS-232 interface. The PGL series works with our AdamDU data collection software or alternatively interface with computers or printers.

*From 1mg to 0.1g the PGL offers higher capacity for laboratory and materials testing applications.*

### Features

- RS-232 interface
- AC power or rechargeable battery operation
- 8 weighing units including one customer unit
- Below balance weighing
- All metal construction
- Backlit LCD display with capacity tracker
- Stainless steel platform

### Applications


- Weighing
- Parts counting
- Percent weighing
- Check weighing
- Density calculation



*RS-232 Interface, security slot and level*



*Large backlit display*



*Stainless steel pan*

## Technical Specifications

Model	PGL 203	PGL 303	PGL 2002	PGL 3002	PGL 4001	PGL 6001	PGL 8001	PGL 10001	PGL 20001
<b>Capacity x Readability</b>	200g x 0.001g	300g x 0.001g	2000g x 0.01g	3000g x 0.01g	4000g x 0.1g	6000g x 0.1g	8000g x 0.1g	10kg x 0.1g	20kg x 0.1g
<b>Repeatability (S.D.)</b>	0.002g	0.003g	0.02g	0.03g	0.2g	0.2g	0.2g	0.2g	0.2g
<b>Linearity (+/-)</b>	0.004g	0.006g	0.04g	0.06g	0.4g	0.4g	0.4g	0.4g	0.4g
<b>Pan Size</b>	145x125mm		192x192mm				400x300mm		
<b>Weighing Units</b>	g/mg/ct/GN/N/ozt/dwt/oz/custom		g/kg/ct/GN/N/ozt/dwt/oz/custom		g/kg/ct/GN/N/lb/oz/lb:oz/custom				
<b>Stabilization Time</b>	2 Secs								
<b>Interface</b>	Bi-directional RS-232 interface								
<b>Calibration</b>	Automatic External								
<b>Display</b>	Backlit LCD display with dual digits and capacity tracker, 24mm								
<b>Power Supply</b>	AC adaptor and rechargeable battery pack (both included)								
<b>Operating Temperature</b>	0° - 40°C								
<b>Housing</b>	Metal die cast housing								
<b>Overall Dimensions</b>	251x358x104mm - (PGL 203, 303, 2002, 3002, 4001, 6001 & 8001) 455x400x95mm - (PGL 10001 & 20001)								
<b>Net Weight</b>	4kg - (PGL 203, 303, 2002, 3002, 4001, 6001 & 8001) 6kg - (PGL 10001 & 20001)								

## Accessories

- Density determination kit
- Anti-Vibration table
- Below balance hanger
- In-use cover
- Kensington® type lock and cable
- RS-232 Cable
- RS-232 to USB converter cable
- AdamDU Data Collection software
- Adam printer
- Printer paper