

HV-G/HW-G Series

Platform Scales



Reliable and Rugged!
Outstanding Price Performance



AND
A&D Company, Limited

...Clearly a Better Value

**“Value”
you can trust**

Platform Scales

Two Types of Displays

Large and Clear Display

Digit height : LCD 25mm/VFD 20mm



LCD

Portable Battery Operation
Operate in areas
with low or no power.

VFD

Easy to see even in dark areas



Printer (Option only for VFD Type)

Dot Impact Printer
Print out your data for
safe keeping.



Water and Dust Resistant

The stainless steel weighing pan and sealed base are
resistant to water and dust. (IP-65)
The weighing pan is easy to clean.

No Corner
Pieces

Clean

Safe



Stainless Steel Weighing Pan



Water and Dust Resistant Protection for Load Cell Sensor

The Gore-tex® membrane
wicks moisture away
and keeps it away.

Gore-Tex® is a registered trade mark
of W. L. Gore & Associates.

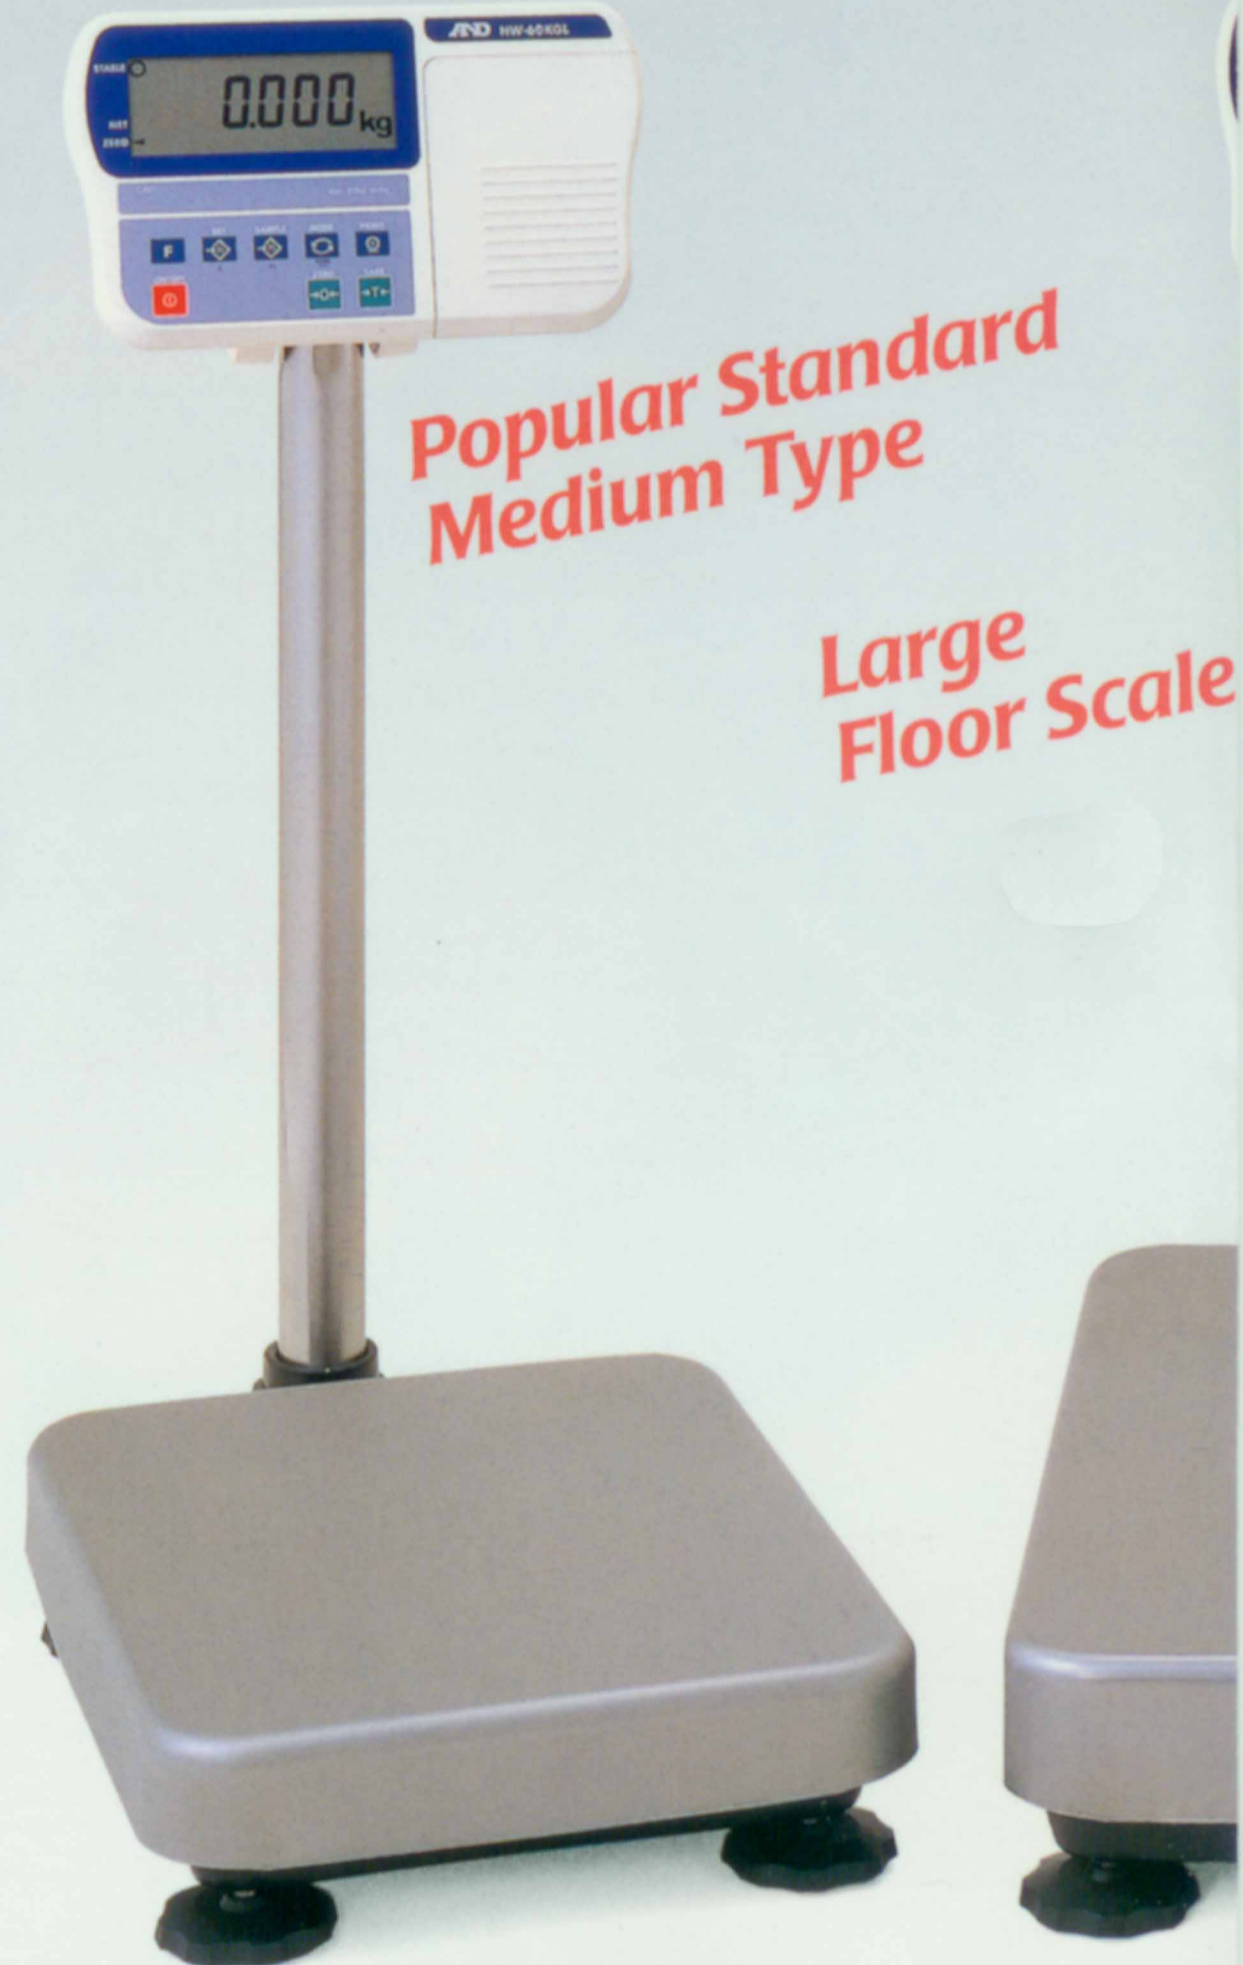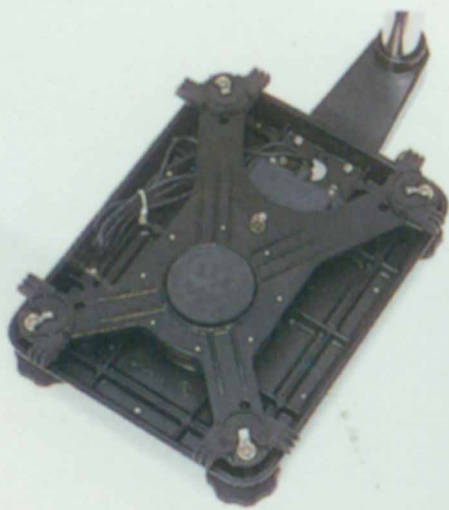

Popular Standard
Medium Type

Large
Floor Scale

HV-G Series

Triple Range

Resolution can be changed
automatically for 3 capacity level:

More Sophisticated Functions

● **Comparator**

Set the high and low weight targets and
show HI/OK/LO on the display.

● **Comparator Buzzer with OP-03**

Optional comparator output sounds buzzer
selected comparator settings.

● **Setpoint Control for Simple Batching**

The weighing data can be controlled at 3
setpoints, Full Flow/Preliminary/Zero Band
outputs.

HV-G/HW-G Series

Wide Selection
14 Models
3 Platform
Sizes

Type

Compact
Bench Scale Type



HW-G series

1/10,000 High Resolution

Ideal for applications requiring enhanced resolution.

ions

● **Tilting Meter Head**

Meter head tilts on the column to adjust for the best viewing angle. Relieves neck and eye strain.

● **Standard RS-232C**

Bi-directional RS-232C to connect with PC and AD-8121 printer.

● **Counting and % Function**

● **M+ Function for totaling weighing data**

Wide Variety of Applications



Food Processing/Fish Industry

Food Packaging



Industrial/Parts Counting



Pharmaceutical/Paint Mixing

Shipping



Model Selection Guide

Which model is best for you ?

Model

HV- **KGL**...LCD
Capacity

V...VFD

HW- **KGL**...LCD
Capacity

V...VFD

Display : LCD (L Type) or VFD (V Type)
Capacity : HV-15, 60, 200(kg) / HW-10, 60, 100, 200(kg)
Resolution : 0.001kg to 0.1kg/0.002 lb to 0.2 lb
Pan Size : Large (390 × 530 mm/15.4 × 20.9 inches)
Medium (330 × 424 mm/13.0 × 16.7 inches)
Small (250 × 250 mm/9.8 × 9.8 inches)
Range : Single Range (HW-G Series)
0.001kg to 0.02kg/0.002 lb to 0.05 lb
Triple Range (HV-G Series)
Example: HV-15KGL

Capacity : 3kg/6 lb Resolution : 0.001kg/0.002 lb
Capacity : 6kg/15 lb Resolution : 0.002kg/0.005 lb
Capacity : 15kg/30 lb Resolution : 0.005kg/0.01 lb

Specifications

HV-GL/GV Series

Display Type	Liquid Crystal Display									Vacuum Fluorescent Display									
Model	HV-15KGL			HV-60KGL			HV-200KGL			HV-15KGV			HV-60KGV			HV-200KGV			
Capacity(kg)	15	6	3	60	30	15	220	150	60	15	6	3	60	30	15	220	150	60	
Resolution(kg)	0.005	0.002	0.001	0.02	0.01	0.005	0.1	0.05	0.02	0.005	0.002	0.001	0.02	0.01	0.005	0.1	0.05	0.02	
Capacity(lb)	30	15	6	150	60	30	500	300	150	30	15	6	150	60	30	500	300	150	
Resolution(lb)	0.01	0.005	0.002	0.05	0.02	0.01	0.2	0.1	0.05	0.01	0.005	0.002	0.05	0.02	0.01	0.2	0.1	0.05	
Max Count (Pieces)	15000			12000			11000			15000			12000			11000			
Operating Temperature	-10°C to 40°C																		
Linearity(g)	±5	±2	±1	±20	±10	±5	±100	±50	±20	±5	±2	±1	±20	±10	±5	±100	±50	±20	
Span Drift	20ppm/°C typ.																		
Pan Size	mm *	250 × 250			330 × 424			390 × 530			250 × 250			330 × 424			390 × 530		
	inches *	9.8 × 9.8			13.0 × 16.7			15.4 × 20.9			9.8 × 9.8			13.0 × 16.7			15.4 × 20.9		
Physical Dimensions	mm **	275 × 474 × 368			330 × 621 × 771			390 × 712 × 773			275 × 474 × 368			330 × 621 × 771			390 × 712 × 773		
	inches **	10.8 × 18.7 × 14.5			13.0 × 24.4 × 30.4			15.4 × 28.0 × 30.4			10.8 × 18.7 × 14.5			13.0 × 24.4 × 30.4			15.4 × 28.0 × 30.4		
Power	AC Adapter or 6 DD alkaline Batteries (600 hours)									AC									
Weight (approximately)	6kg/13.2 lb			11kg/24.3 lb			17kg/37.5 lb			7kg/15.4 lb			12kg/26.5 lb			18kg/39.7 lb			
Standard Accessories	AC Adapter, Display Cover, Manual									Display Cover, Manual									

HW-GL/GV Series

Display Type	Liquid Crystal Display				Vacuum Fluorescent Display			
Model	HW-10KGL	HW-60KGL	HW-100KGL	HW-200KGL	HW-10KGV	HW-60KGV	HW-100KGV	HW-200KGV
Capacity(kg)	10	60	100	220	10	60	100	220
Resolution(kg)	0.001	0.005	0.01	0.02	0.001	0.005	0.01	0.02
Capacity(lb)	20	150	200	500	20	150	200	500
Resolution(lb)	0.002	0.01	0.02	0.05	0.002	0.01	0.02	0.05
Max Count (Pieces)	10000	12000	10000	11000	10000	12000	10000	11000
Operating Temperature	-10°C to 40°C							
Linearity(g)	±2	±10	±20	±40	±2	±10	±20	±40
Span Drift	20ppm/°C typ.							
Pan Size	mm *	250 × 250	330 × 424	390 × 530	250 × 250	330 × 424	390 × 530	
	inches *	9.8 × 9.8	13.0 × 16.7	15.4 × 20.9	9.8 × 9.8	13.0 × 16.7	15.4 × 20.9	
Physical Dimensions	mm **	275 × 474 × 368	330 × 621 × 771	390 × 712 × 773	275 × 474 × 368	330 × 621 × 771	390 × 712 × 773	
	inches **	10.8 × 18.7 × 14.5	13.0 × 24.4 × 30.4	15.4 × 28.0 × 30.4	10.8 × 18.7 × 14.5	13.0 × 24.4 × 30.4	15.4 × 28.0 × 30.4	
Power	AC Adapter or 6 DD alkaline Batteries (600 hours)				AC			
Weight (approximately)	6kg/13.2 lb	11kg/24.3 lb	17kg/37.5 lb		7kg/15.4 lb	12kg/26.5 lb	18kg/39.7 lb	
Standard Accessories	AC Adapter, Display Cover, Manual				Display Cover, Manual			

* Stainless Steel Weighing Pan (No Corner Piece) W × D ** W × D × H

Specifications are subject to change for improvement without notice.

Options

OP-03 — RS-232C with Comparator Relay Out/Buzzer
OP-04 — RS-422/485 with Comparator Relay Out
OP-06 — Built-In Printer for HV-GV and HW-GV
OP-13 — Roller Conveyor: HV-200K, HW-100K/200K
OP-14 — Roller Conveyor: HV-60K, HW-60K

Accessories

AX-PP156-S — Printer Paper for the OP-06 (10 rolls)
AX-ERC-05-S — Ink Ribbons for the OP-06 (5 pieces)

A&D

...Clearly a Better Value

A&D Company, Limited

3-23-14 Higashi-Ikebukuro, Toshima-ku, Tokyo 170-0013 JAPAN
Telephone: [81] (3) 5391-6132 Fax: [81] (3) 5391-6148
http://www.aandd.co.jp

A&D ENGINEERING, INC.

1555 McCandless Drive, Milpitas, CA. 95035 U.S.A.
Telephone: [1] (408) 263-5333 Fax: [1] (408) 263-0119

A&D MERCURY PTY. LTD.

32 Dew Street, Thebarton, South Australia 5031 AUSTRALIA
Telephone: [61] (8) 352-3033 Fax: [61] (8) 352-7409

A&D INSTRUMENTS LTD.

Abingdon Science Park, Abingdon, Oxford OX14 3YS ENGLAND
Telephone: [44] (1235) 550420 Fax: [44] (1235) 550485

< German Sales Office >

Berner Straße 64, 60437 Frankfurt/Main 50 GERMANY
Telephone: [49] (69) 507 1017 Fax: [49] (69) 507 2054

A&D KOREA Limited

Manhattan Bldg. 8F, 36-2 Yoido-dong, Youngdeungpo-gu, Seoul, KOREA
Telephone: [82] (2) 780-4101 Fax: [82] (2) 782-4280