


Beer Bottle Shaker SM 30 B / SM 30 B control

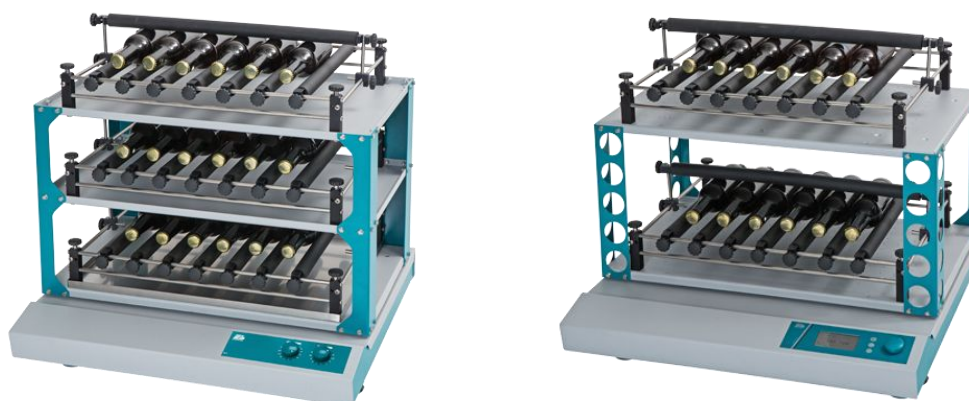

Description

Table-top shaker for high loads and continuous operation

桌面式摇床 高负荷和连续运行

Basic Equipment Basic device with shaking plate and rubber mat, **without rack system**

基本设备 基本设备用的平台摇板和橡胶垫,没有篮架系统

Loading Capacity Up to 6 horizontal bottles (0.33 or 0.5L) per storey

装载量 6瓶(0.33或0.5 L)每层

SM 30 B	Order No. 6103 S01
SM 30 B control	Order No. 6102 S02
Technical Data	
Motion:	reciprocating (horizontal)
Shaking platform:	560 x 400 mm
Max. load:	20 kg
Shaking speed:	up to 200 rpm, steplessly adjustable
Stroke:	50 mm (for Gushing Test)
Timer:	0 - 120 min / continuous
Electrical supply:	230 V, 50 Hz
Enclosure protection:	IP 21
Heat emission:	approx. 20 - 30 W
Ambient temperature:	5° C to 50° C
Relative humidity:	~ 85 %
Dimensions (w x d x h):	680 x 610 x 160 mm
Weight:	33 kg

篮架系统 所需配件的最大装载量每层6瓶

Required accessories for the maximum loading capacity of 6 bottles per storey

1-storey top frame

Dimensions (w x d x h): 600 x 440 x 160 mm

Weight: 2.6 kg

- | | | |
|-----|---------------------------|--------------------|
| 1 x | Rack system Combifix SM A | Order No. 0050 154 |
| 2 x | Clamping strip h | Order No. 0050 400 |
| 1 x | Clamping strip q | Order No. 0050 403 |



2-storey top frame

Dimensions (w x d x h): 680 x 420 x 480 mm

Weight: 7.7 kg

- | | | |
|-----|---------------------------|--------------------|
| 1 x | 2-storey top frame SM | Order No. 0052 065 |
| 2 x | Rack system Combifix SM A | Order No. 0050 154 |
| 4 x | Clamping strip h | Order No. 0050 400 |
| 2 x | clamping strip q | Order No. 0050 403 |



3-storey top frame

Dimensions (w x d x h): 680 x 440 x 540 mm

Weight: 12 kg

- | | | |
|-----|---------------------------|--------------------|
| 1 x | 3-storey top frame SM | Order No. 0039 206 |
| 3 x | Rack system Combifix SM A | Order No. 0050 154 |
| 6 x | Clamping strip h | Order No. 0050 400 |
| 3 x | clamping strip q | Order No. 0050 403 |

