



INTEGRA 9570 ENGINEERING SPECIFICATIONS

PATENT PENDING

Physical Properties

Height		
▪ Verifier height	2.13 inches	54.10 mm
▪ Total height including handle	4 inches	101.6 mm
Length	3.94 inches	100.08 mm
Width	6.56 inches	166.62 mm
Weight	2.3 pounds	1.04 kg

Line Scan Camera

- 400 DPI
- Floating Sensor Head

Overall Scanning Width

- 5.4 inches (137.16 mm) in picket fence format
Up to 12.0 inches (305 mm) in ladder format

Minimum X-Dimension

- 1D (Narrow Bar Width): 8.8 mils (.0088") (.223 mm)
- 2D (Cell Size): 12.5 mils (.0125") (.317 mm)

Verification

- 1D and 2D codes that comply with ISO/IEC standards and GS1 General Specifications

Minimum PC Requirements

(PC Supplied by Customer)

- Windows® XP Professional or Windows® 7
(Windows® Vista is not supported)
- Intel® Core™ 2 Duo Processor (or equivalent)
- 2 GB RAM
- 800 x 600 Resolution
- One available USB 2.0 port

Light Source

- Red Light
- 660 nm

Inputs / Outputs

- USB 2.0 port

Operating Temperature

- 10° C (50° F) to 30° C (86° F)

Storage Temperature


- 0° C (32° F) to 40° C (104° F)

Relative Humidity

- 20% to 70% (non-condensing)

Calibration

- EAN/UPC Calibrated Conformance Test Card
(LVS® part # CAL002)

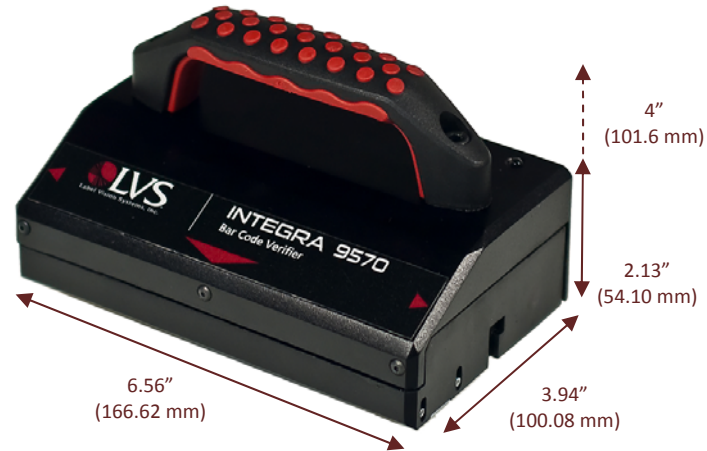

CONTACT FOR FREE DEMO!

+1-770-487-6414 ♦ info@lvs-inc.com

Photos subject to change



SUPPORTED SYMBOLOGIES

Aztec Code	Hanxin Code
Composite Code CC-A	Interleaved 2 of 5 (ITF)
Composite Code CC-B	ITF-14
Composite Code CC-C	Japan Post
Codabar	MaxiCode
Code 128	Micro QR Code
Code 39	MicroPDF417
Code 93	MSI Plessey
DataBar expanded	PDF417
DataBar limited	Pharmacode – Italian
DataBar stacked	Pharmacode - Laetus
DataBar-14	QR Code
EAN/JAN-13	UPC-A
EAN/JAN-8	UPC-E
ECC-200 (Data Matrix)	USPS Intelligent Mail Barcode (also referred to as 4-State Barcode)
GS1-128	

SUPPORTED STANDARDS

APPLICATION STANDARDS

Below are just a few Application Standards supported by the INTEGRA 9570:

AIAG/DAMA/JAPIA/Odette
 ALDI
 AS9132-A /AIM DPM Cat 0
 DHL
 GS1 General Specifications
 IFAH
 ISO/IEC 15415/15416
 Italian Pharmacode
 Japan Codabar
 Laetus Miniature Pharmacode
 Laetus Pharmacode
 Laetus Standard
 MIL-STD-130M
 PZN (big, normal, small)

ISO CONFORMANCE STANDARDS

ISO/IEC 15415:2004(E)
 ISO/IEC 15416:2000(E)
 ISO/IEC 15426-1:2000(E)
 ISO/IEC 15426-2:2004(E)
 All Supported ISO/IEC Symbology Specifications

The INTEGRA 9570 is 21 CFR Part 11 compliant-ready.

All Contents Copyright © LVS® 2012. Photos subject to change. LVS® reserves the right to change or modify this information without prior notice. Updated 26-March-2012. INTEGRA 9570 Patent Pending.

Label Vision Systems
 101 Auburn Court
 Peachtree City, GA 30269
 USA

Phone: +1-770-487-6414
 Toll Free: +1-800-432-9430
 Fax: +1-770-487-0860
 E-mail: info@lvs-inc.com

Visit us online at
www.lvs-inc.com

